

ConnectCore for i.MX8M Nano DVK


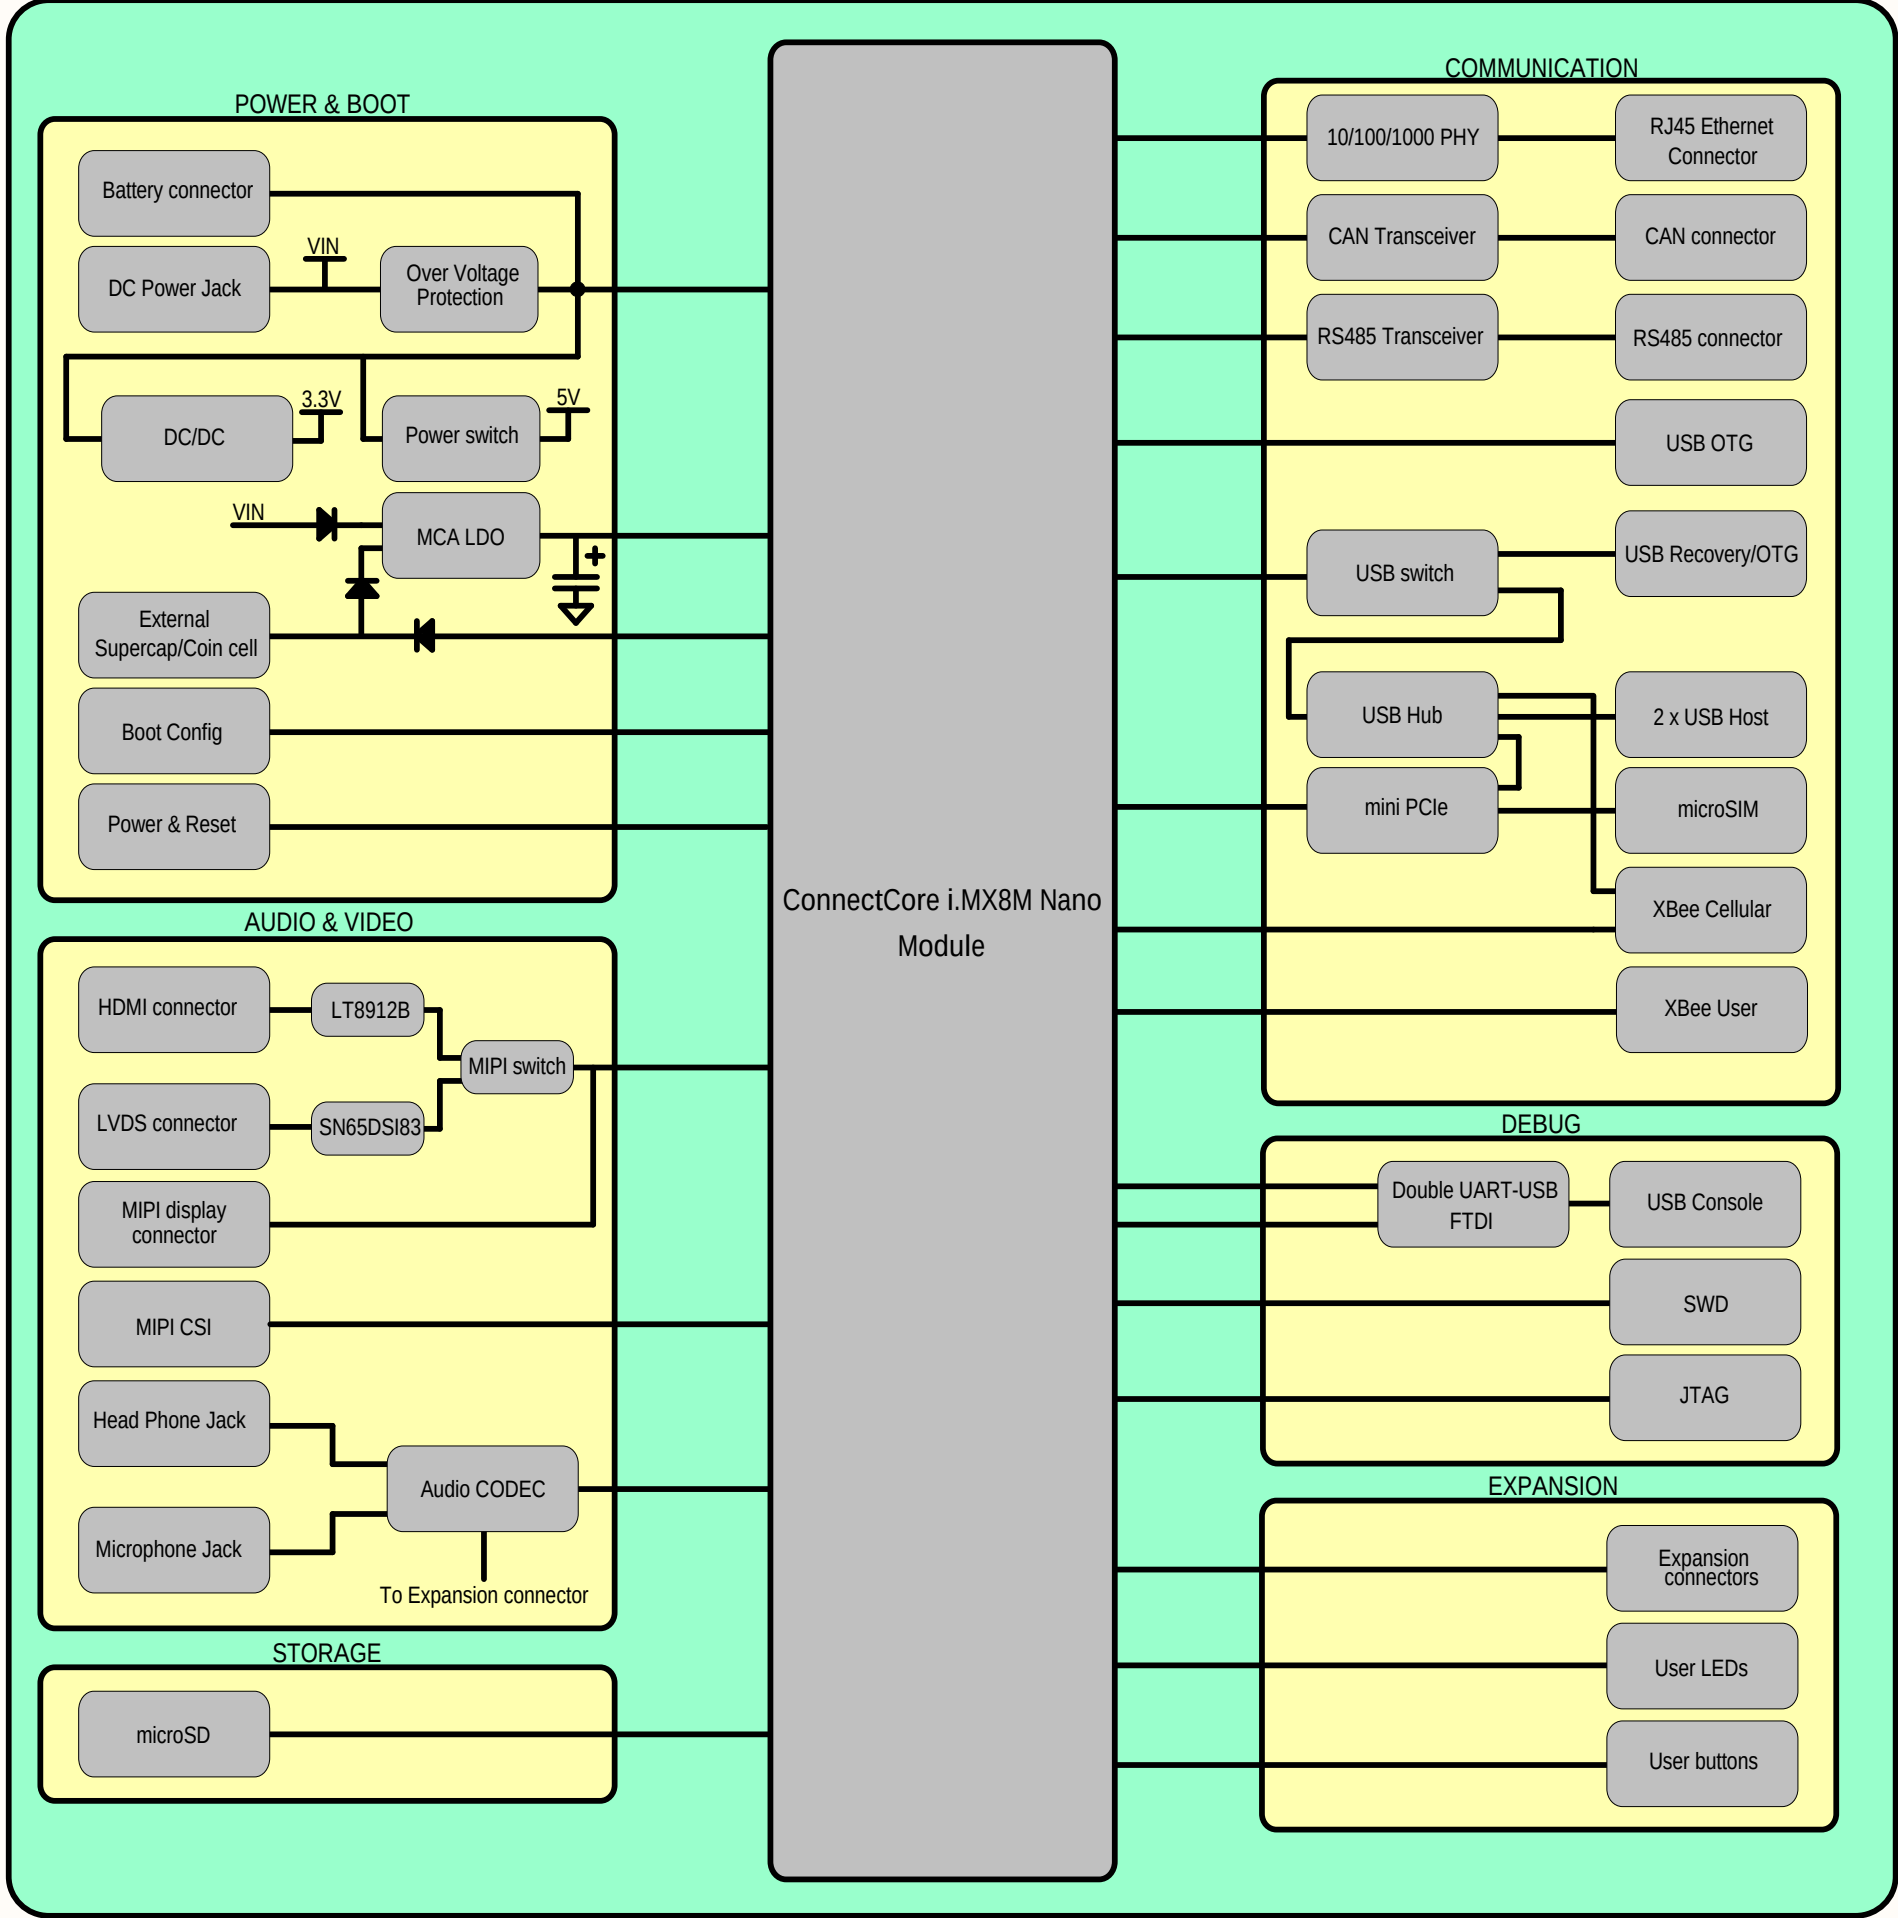


Table of Content

Page	Name
Page 1	Block Diagram
Page 2	Power Diagram
Page 3	Power, reset
Page 4	CCIMX8M Nano Power, Control, MCA
Page 5	CCIMX8M Nano Digital interfaces
Page 6	CCIMX8M Nano RF, PCIe
Page 7	Bootstrap
Page 8	Consoles
Page 9	JTAG, SWD, uSD, Mini PCIe, uSIM
Page 10	RS485, CAN
Page 11	Ethernet
Page 12	MIPI display and switch, MIPI camera
Page 13	MIPI to HDMI bridge
Page 14	MIPI to LVDS bridge
Page 15	USB HUB
Page 16	USB Recovery, USB OTG
Page 17	Audio
Page 18	I2C, XBee
Page 19	Expansion connectors, User LEDs, RF signals
Page 20	GPIO table, System power rails
Page 21	History, Mechanicals


Power architecture diagram

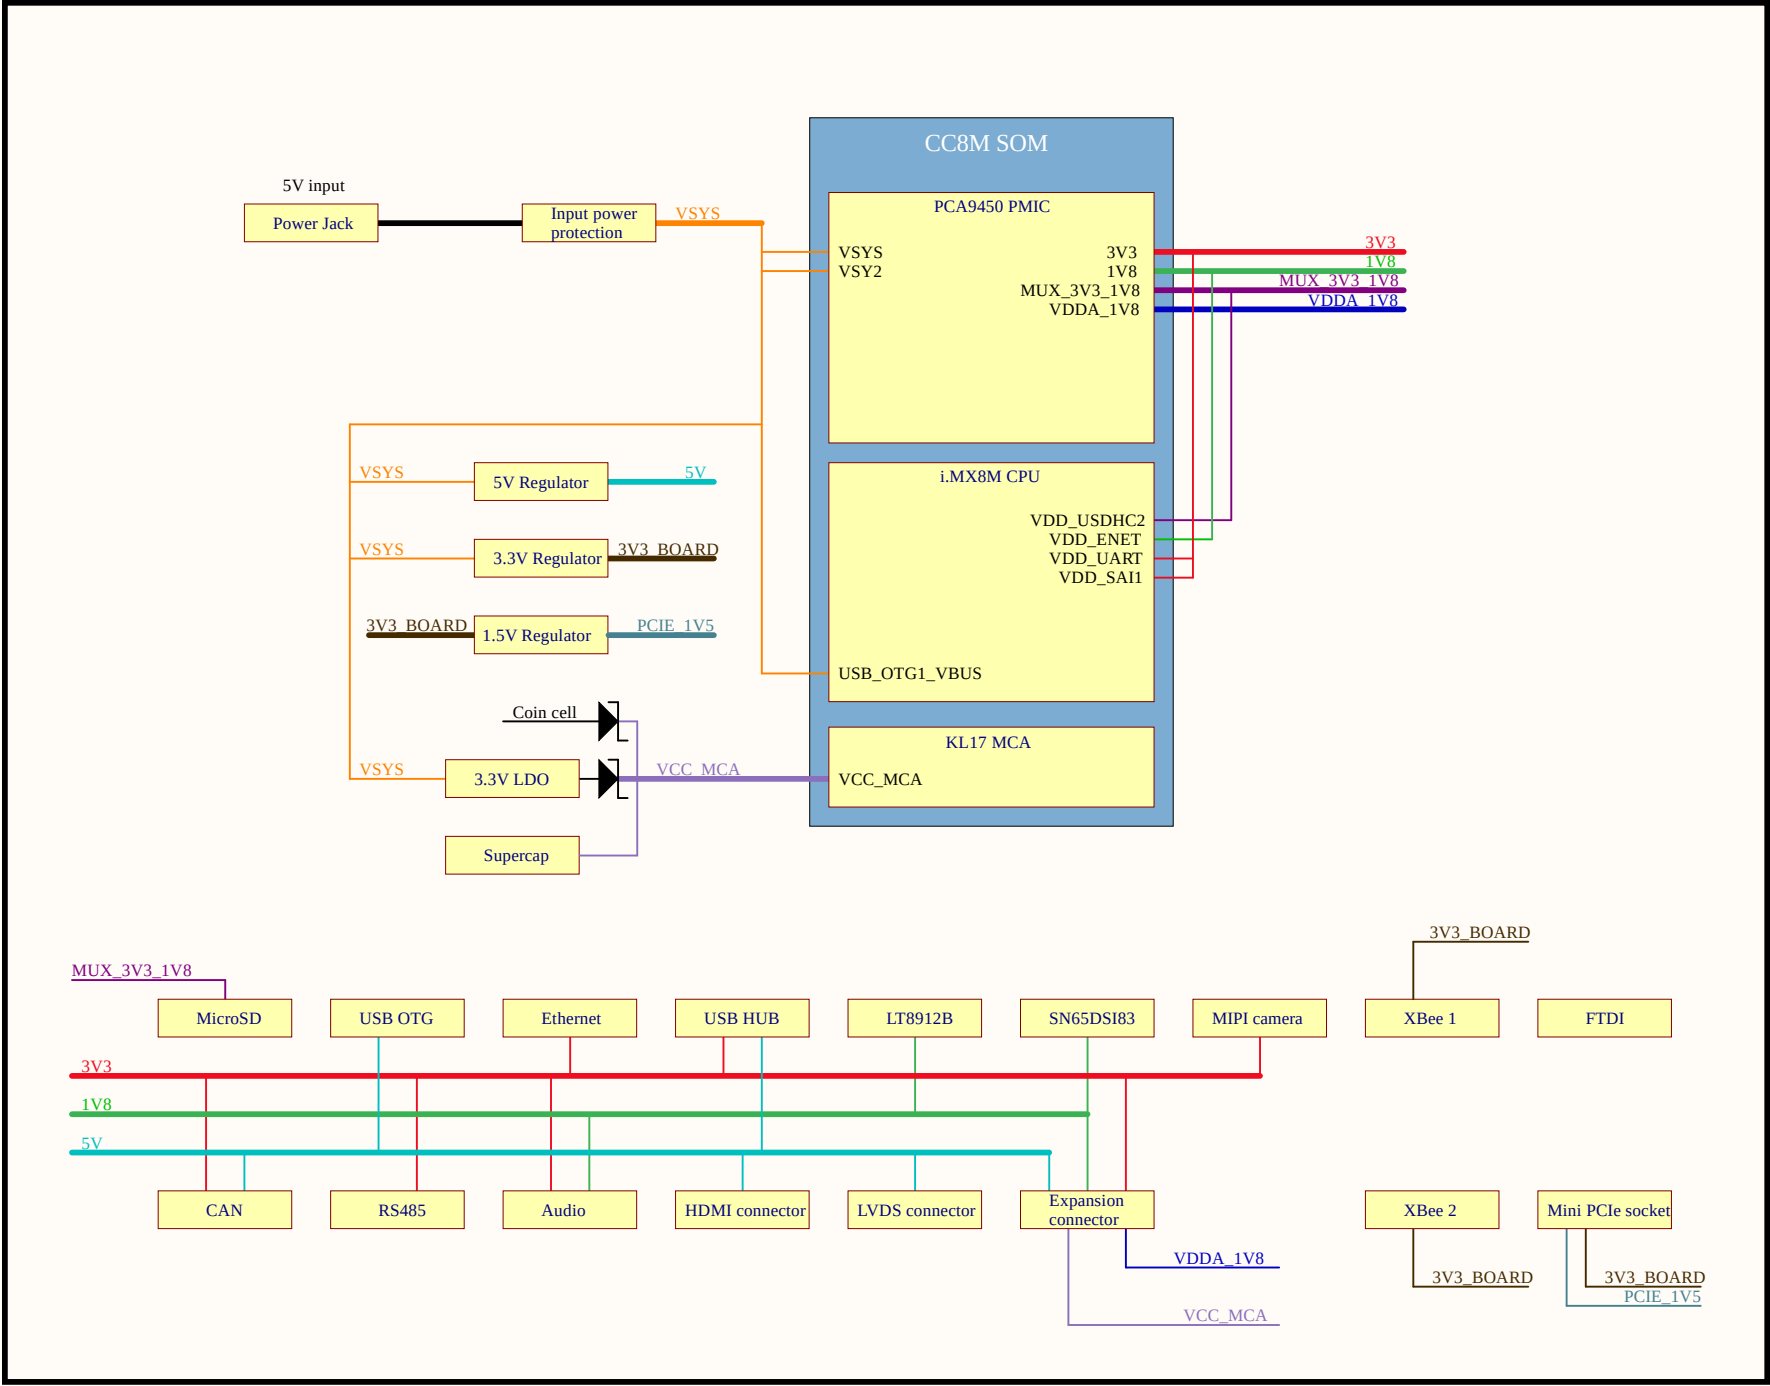



PCIE_VCC

PCIE_VCC	R143	R144
4V	68K	12K
3.3V	53.6K	12K


PCIe_VCC	R143	R144
4V	68K	12K
3.3V	53.6K	12K

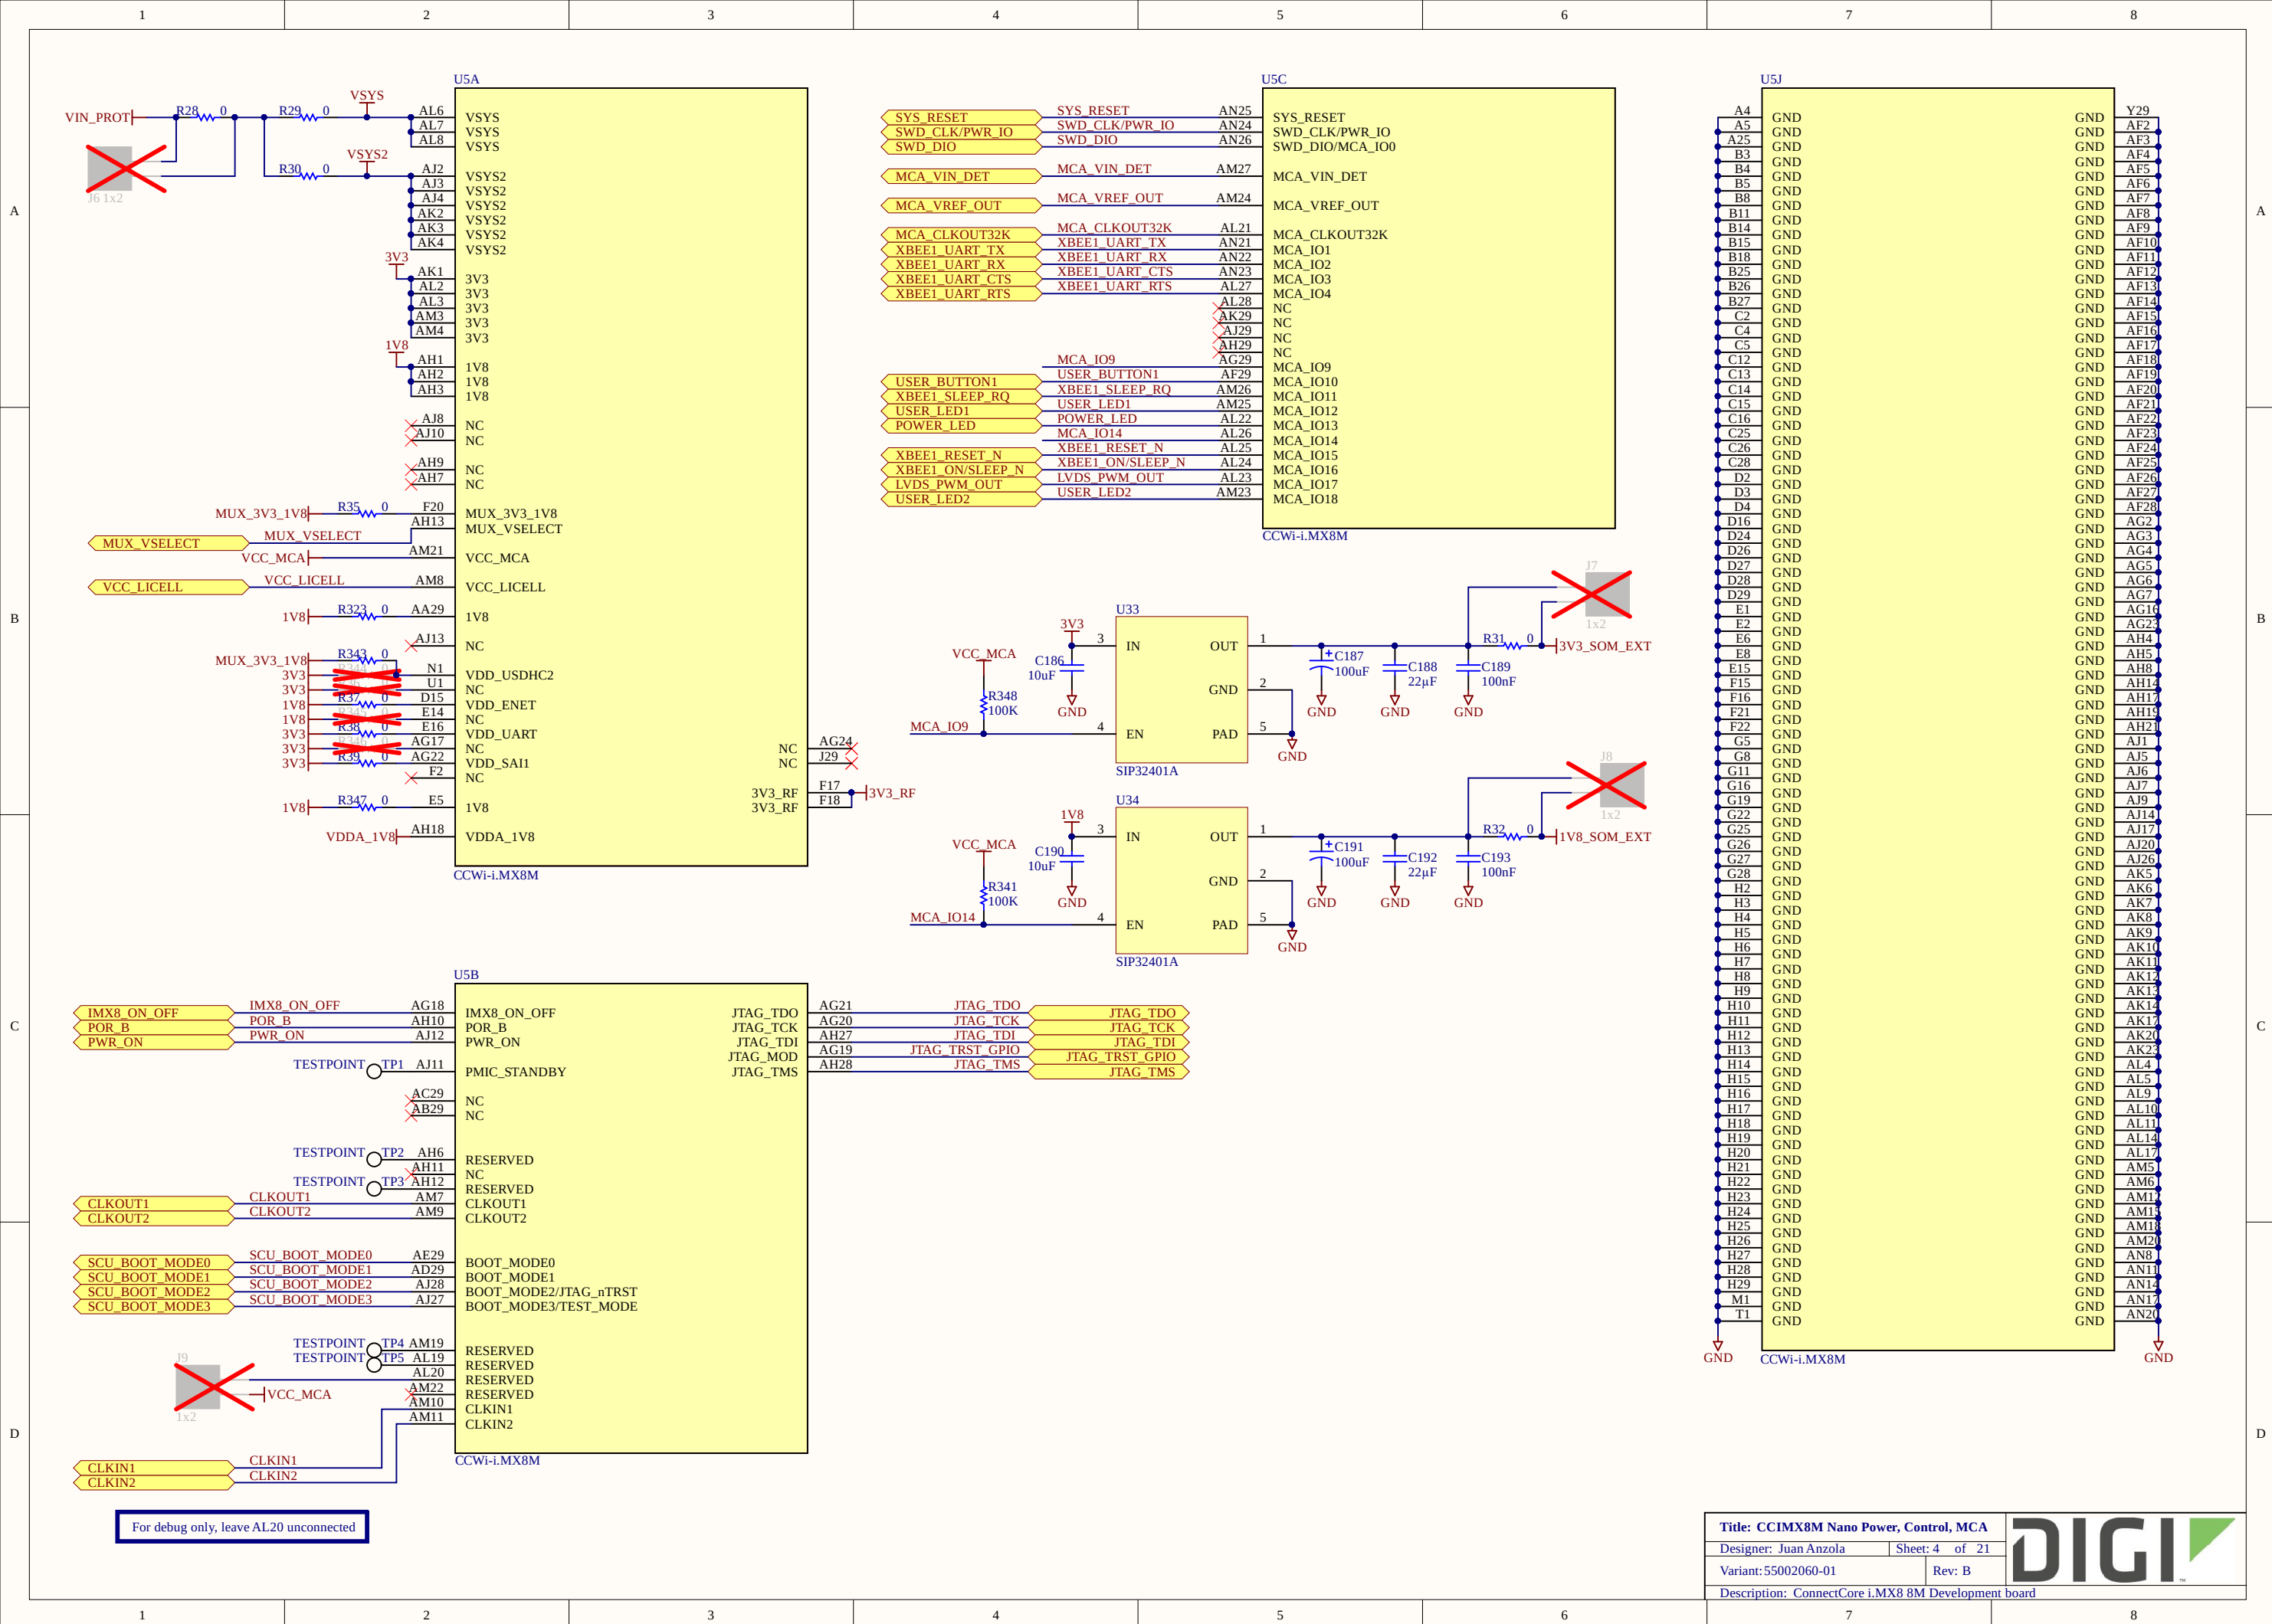

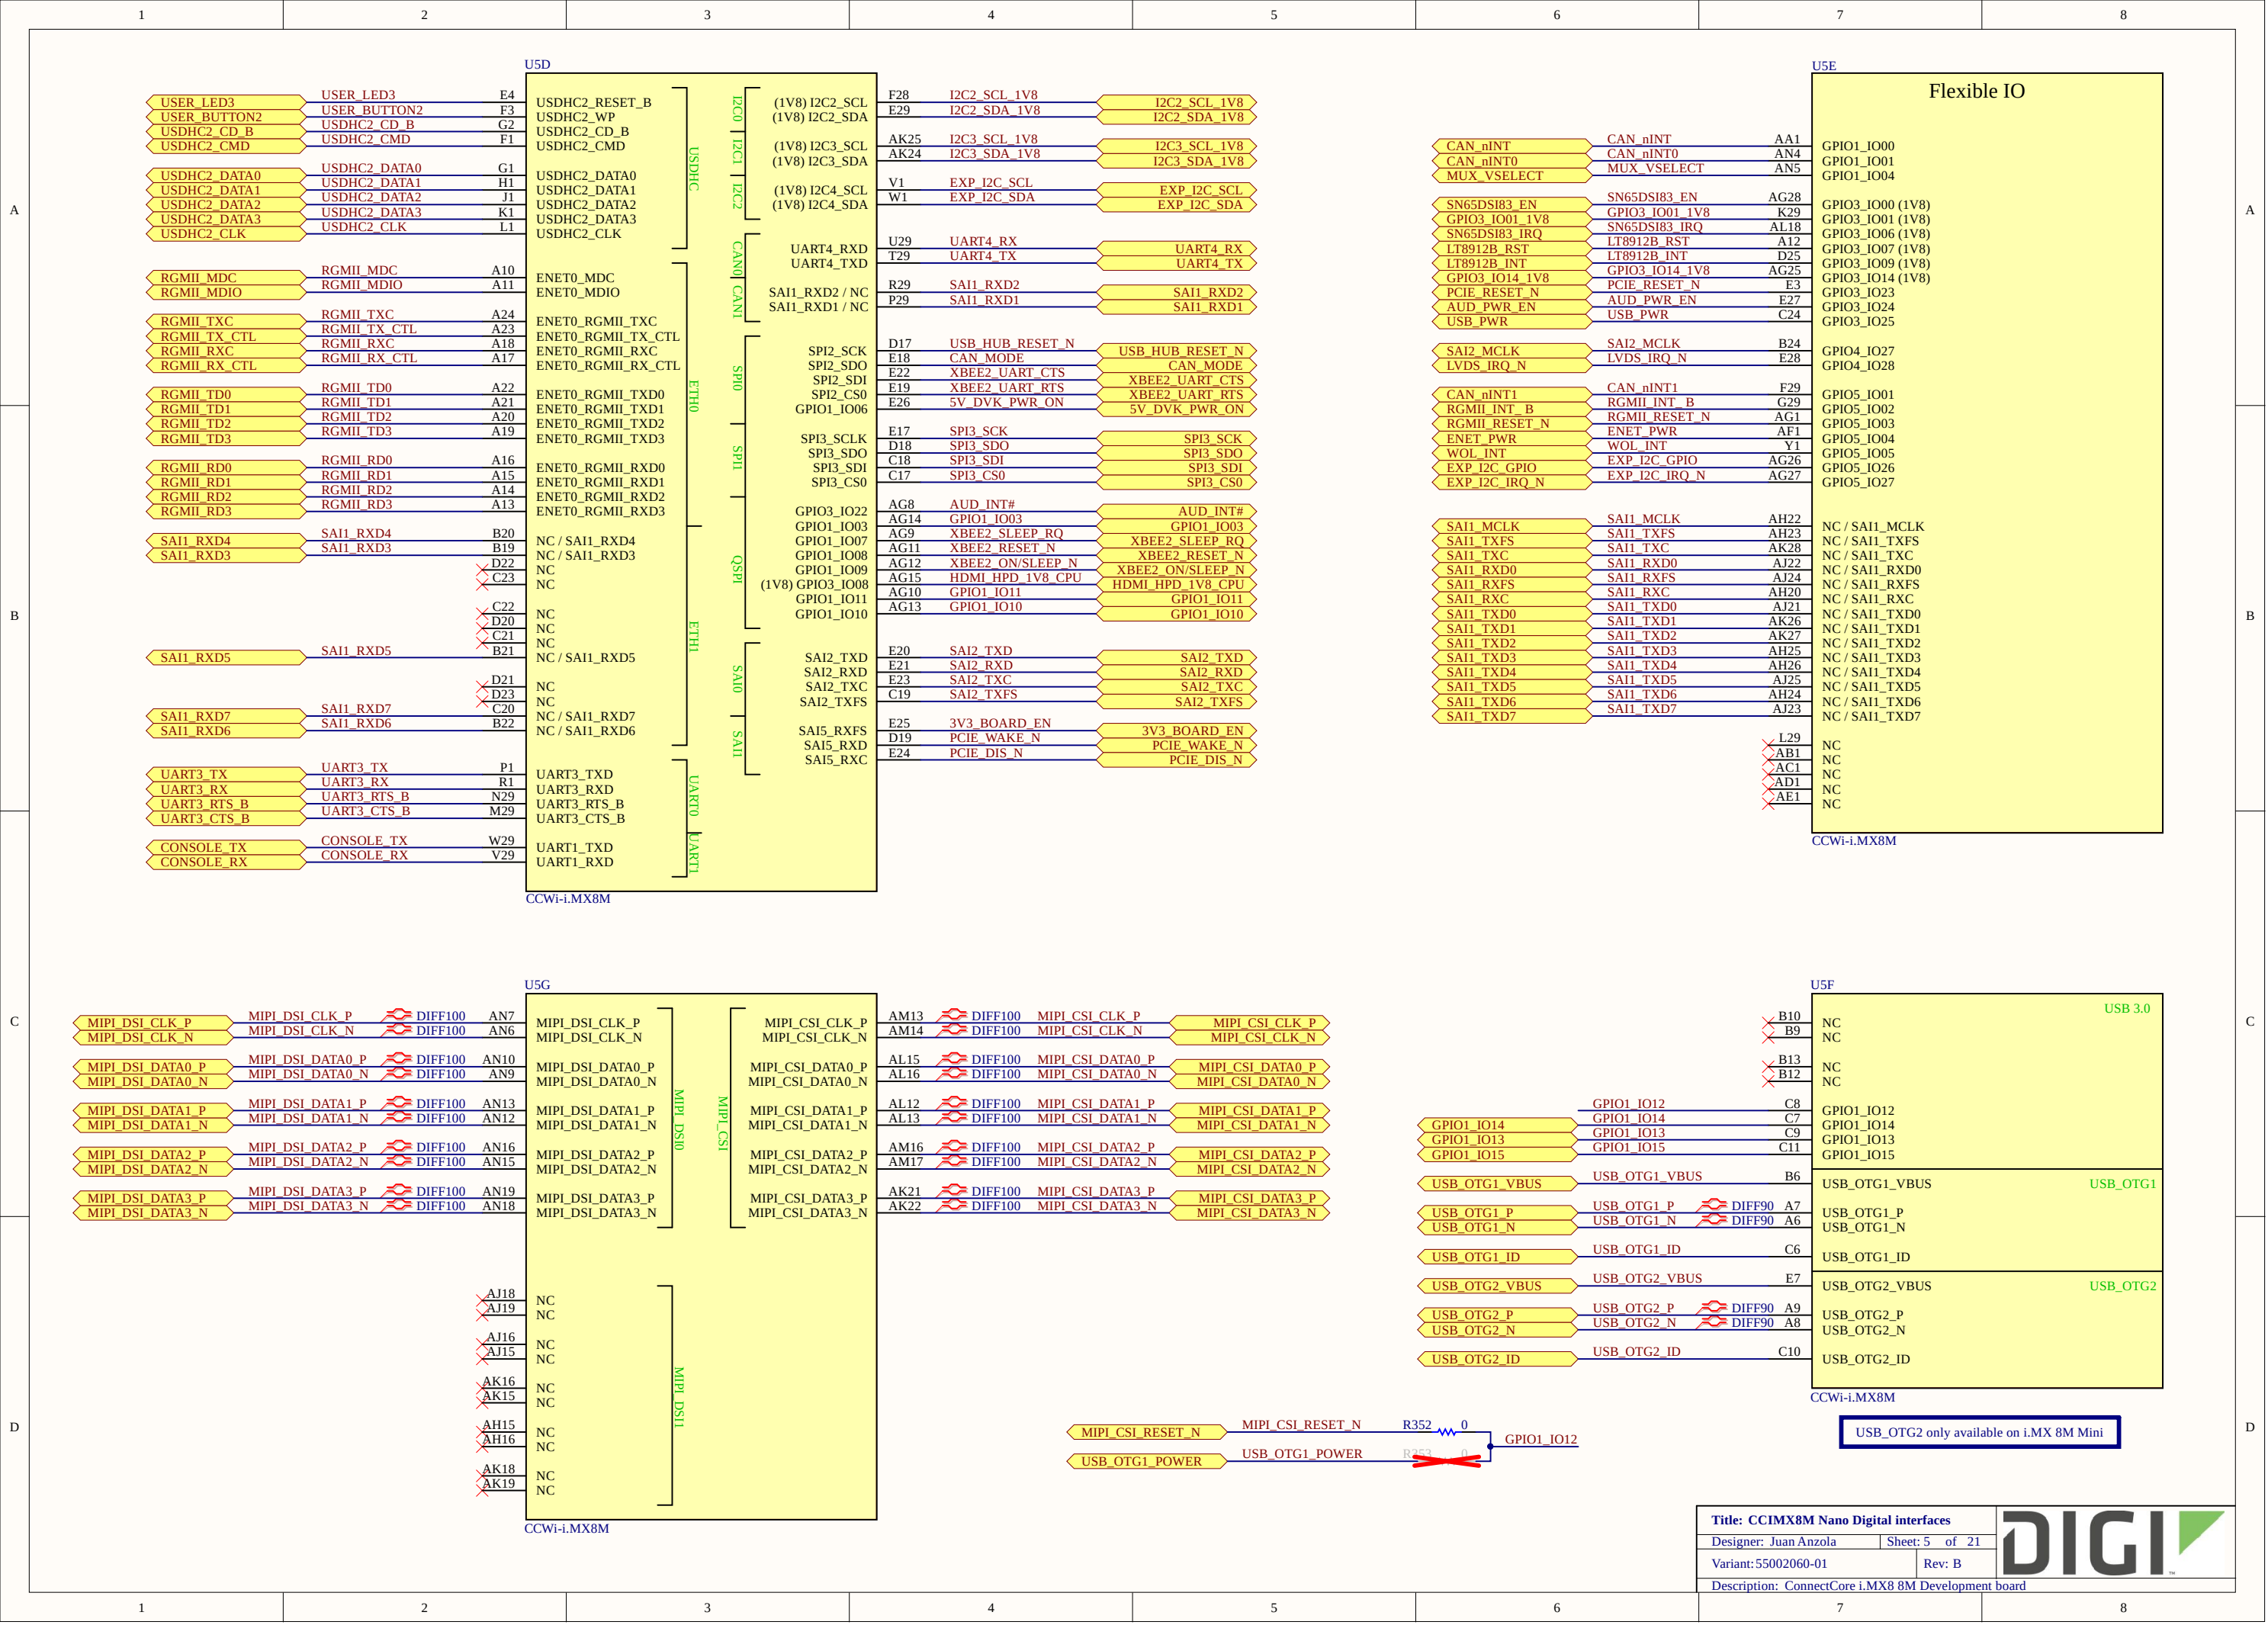

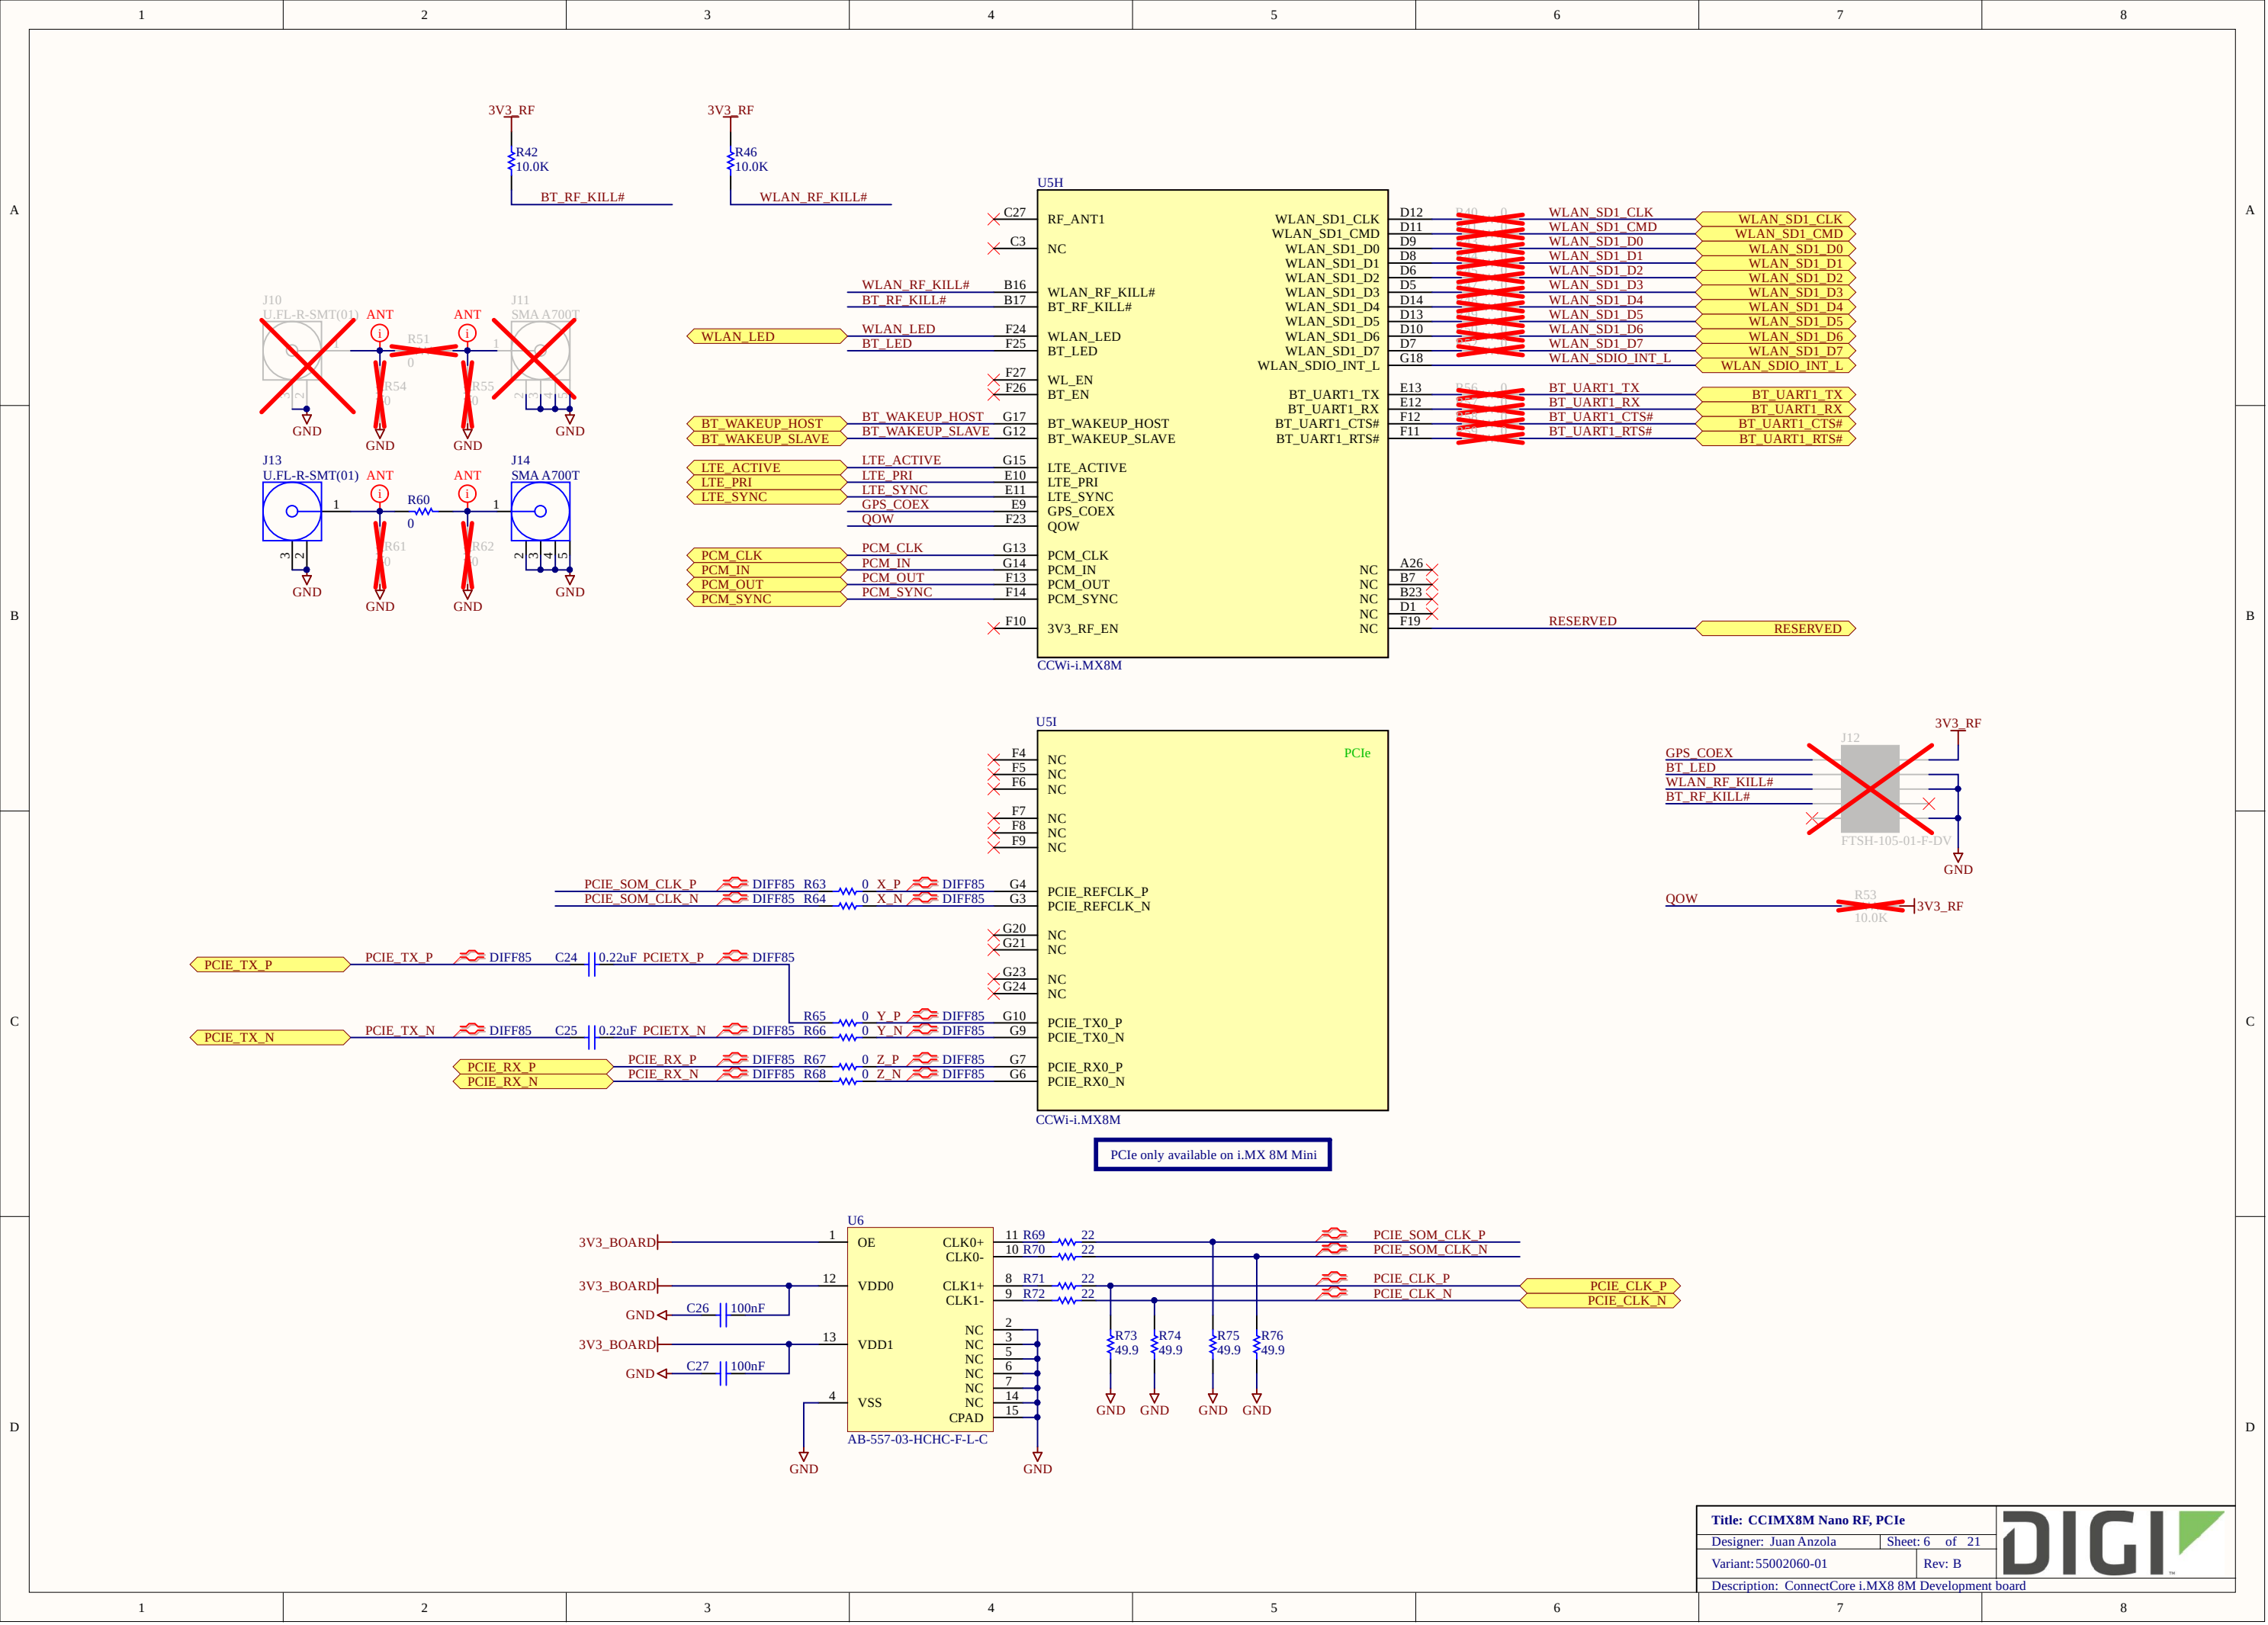


Boot Mode

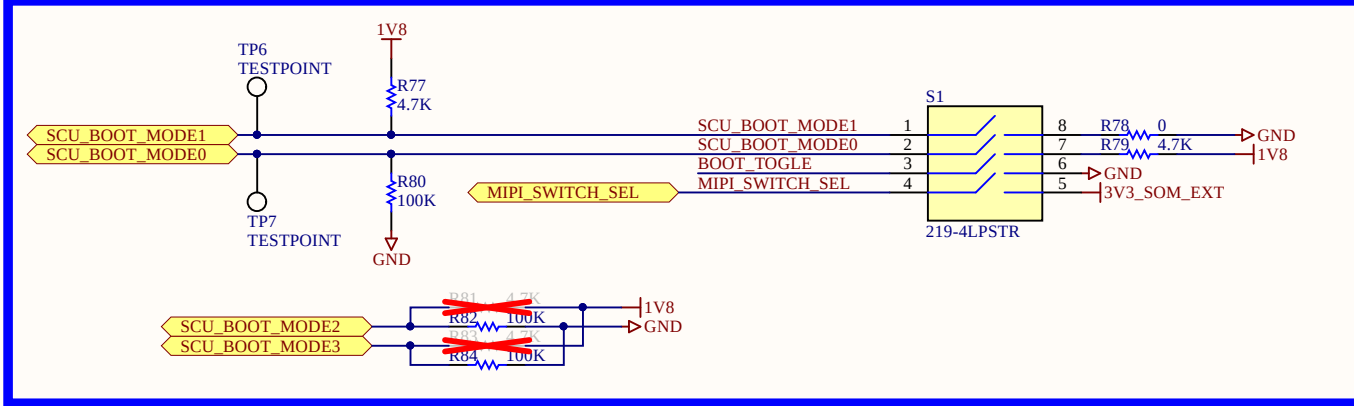


SW1.4	SW1.3	SW1.2	SW1.1	Description
-	Open	Open	Open	Boot from eMMC0
-	Close	Close	Open	Boot from microSD
-	-	Open	Close	Boot from Fuses
-	-	Close	Close	Serial downloader
Open	-	-	-	MIPI connected to HDMI
Close	-	-	-	MIPI connected to LVDS

SW1.3 only required for CC8M Mini

i.MX 8M Mini bootstrap

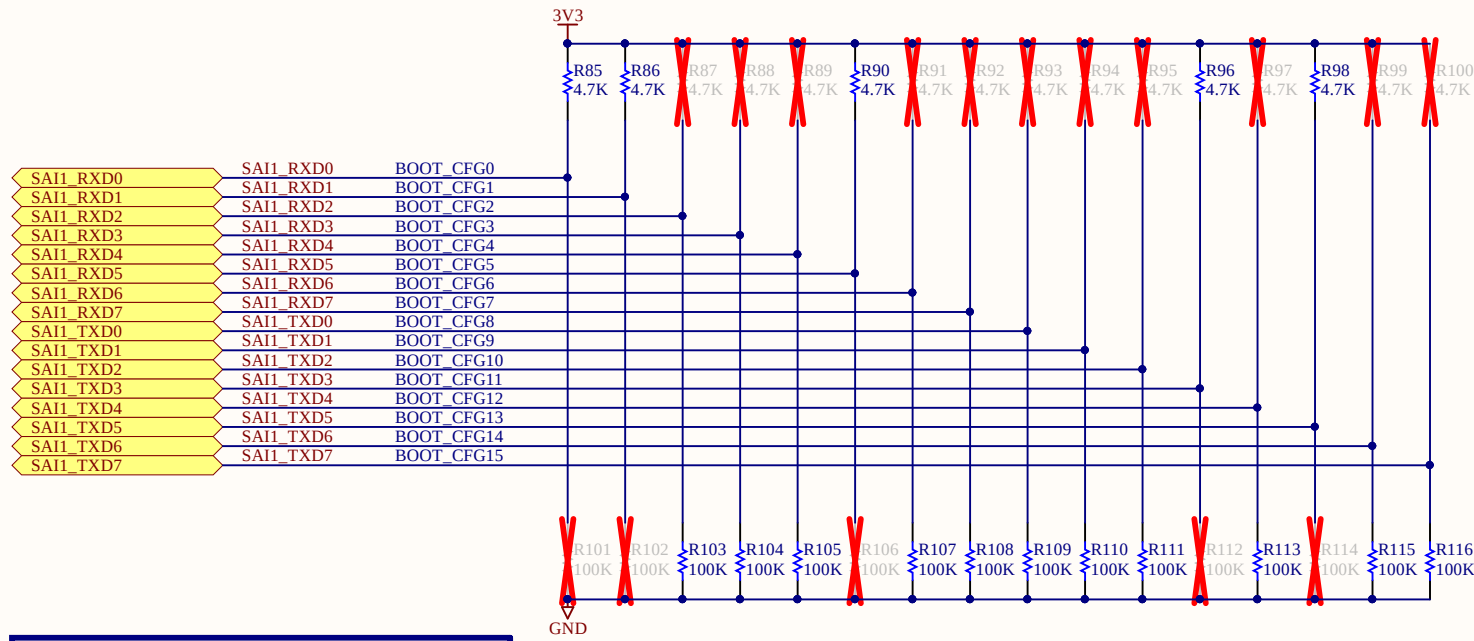


BOOT_CFG[1,2,5,6,11,13] have internal 10K pull-up in the SOM.

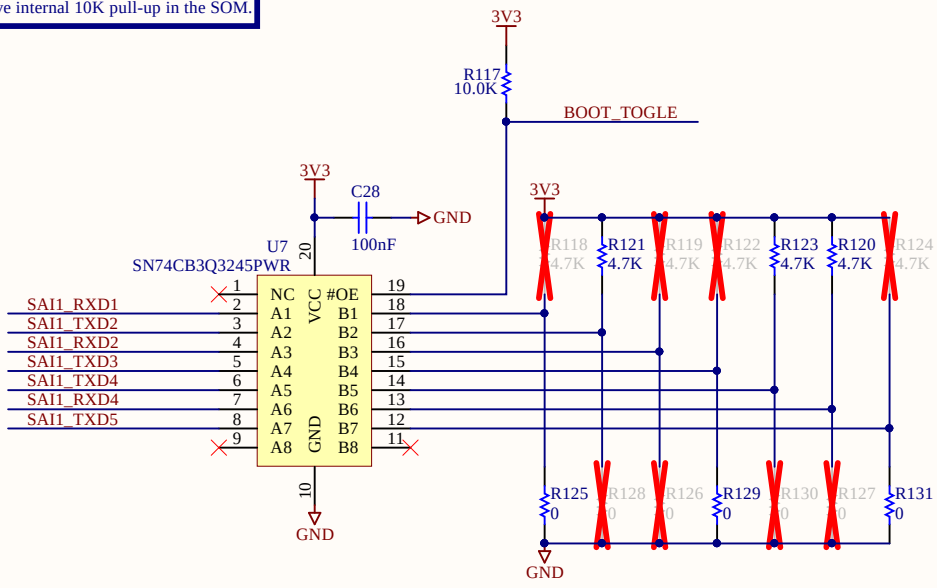


	BOOT_CFG[15]	BOOT_CFG[14]	BOOT_CFG[13]	BOOT_CFG[12]	BOOT_CFG[11]	BOOT_CFG[10]	BOOT_CFG[9]	BOOT_CFG[8]
Infinity loop (Debug USE only) 0 - Disable 1 - Enable	001 - SD/eSD		Port Select: 00 - uSDHC1 01 - uSDHC2 10 - uSDHC3		Power Cycle Enable: 0 - No Power Cycle 1 - Enabled via		SD Loopback Clock Source Sel (for SDR50 and SDR104 only): 0 - through SD pad 1 - direct	
	010 - MMC/eMMC		Pages In Block: 00 - 128 01 - 64 10 - 32 11 - 256		Nand_Row_address_bytes: 00 - 3 01 - 2 10 - 4 11 - 5			
	011 - NAND		Flash Auto Probe		FLASH_TYPE: 000 - Device supports 3B read by default 001 - Device supports 4B read by default 010 - HyperFlash 1V8 011 - HyperFlash 3V3 100 - MXIC Octal DDR			
	100 - QSPI		Port Select 000 - eCSPI1 001 - eCSPI2 010 - eCSPI3		SPI Addressing: 0 - 3-bytes (24-bit) 1 - 2-bytes (16-bit)			
	110 - SPI NOR							
	BOOT_CFG[7]	BOOT_CFG[6]	BOOT_CFG[5]	BOOT_CFG[4]	BOOT_CFG[3]	BOOT_CFG[2]	BOOT_CFG[1]	BOOT_CFG[0]
SD/eSD	Reserved	Reserved	Reserved	Bus Width: 0 - 1-bit 1 - 4-bit	Speed 000 - Normal/SDR12 001 - High/SDR25 010 - SDR50 011 - SDR104 101 - Reserved for DDR50 Others - Reserved	Reserved	Reserved	Reserved
MMC/eMMC	Fast Boot: 0 - Regular 1 - Fast Boot	Bus Width 000 - 1-bit 001 - 4-bit 010 - 8-bit 101 - 4-bit DDR (MMC 4.4) 110 - 8-bit DDR (MMC 4.4) Else - Reserved	Speed: 00 - Normal 01 - High 10 - Reserved for HS200 11 - Reserved	USDHC IO VOLTAGE SELECTION For Normal Boot Mode 0 - 3.3V 1 - 1.8V	USDHC IO VOLTAGE SELECTION For Manufacture Mode 0 - 3.3V 1 - 1.8V	Reserved	Reserved	Reserved
NAND	BT_TOGGLEMODE	BOOT_SEARCH_COUNT: 00 - 2 01 - 2 10 - 4 11 - 8	Toggle Mode 33MHz Preamble Delay, Read Latency: 000 - 16 GPMICLK cycles 001 - 1 GPMICLK cycles 010 - 2 GPMICLK cycles 011 - 3 GPMICLK cycles 100 - 4 GPMICLK cycles 101 - 5 GPMICLK cycles 110 - 6 GPMICLK cycles 111 - 7 GPMICLK cycles 1111 - 15 GPMICLK cycles		Reserved	Reserved	Reserved	Reserved
FlexSPI	HOLD TIME: 00 - 500us 01 - 1ms 10 - 3ms 11 - 10ms	FLASH Auto Probe Type		FLexSPI FLASH Dummy Cycle		Reserved	Reserved	Reserved
SPINOR	CS select SPI only: 00 - CS#0 default 01 - CS#1 10 - CS#2 11 - CS#3	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved


Console ports

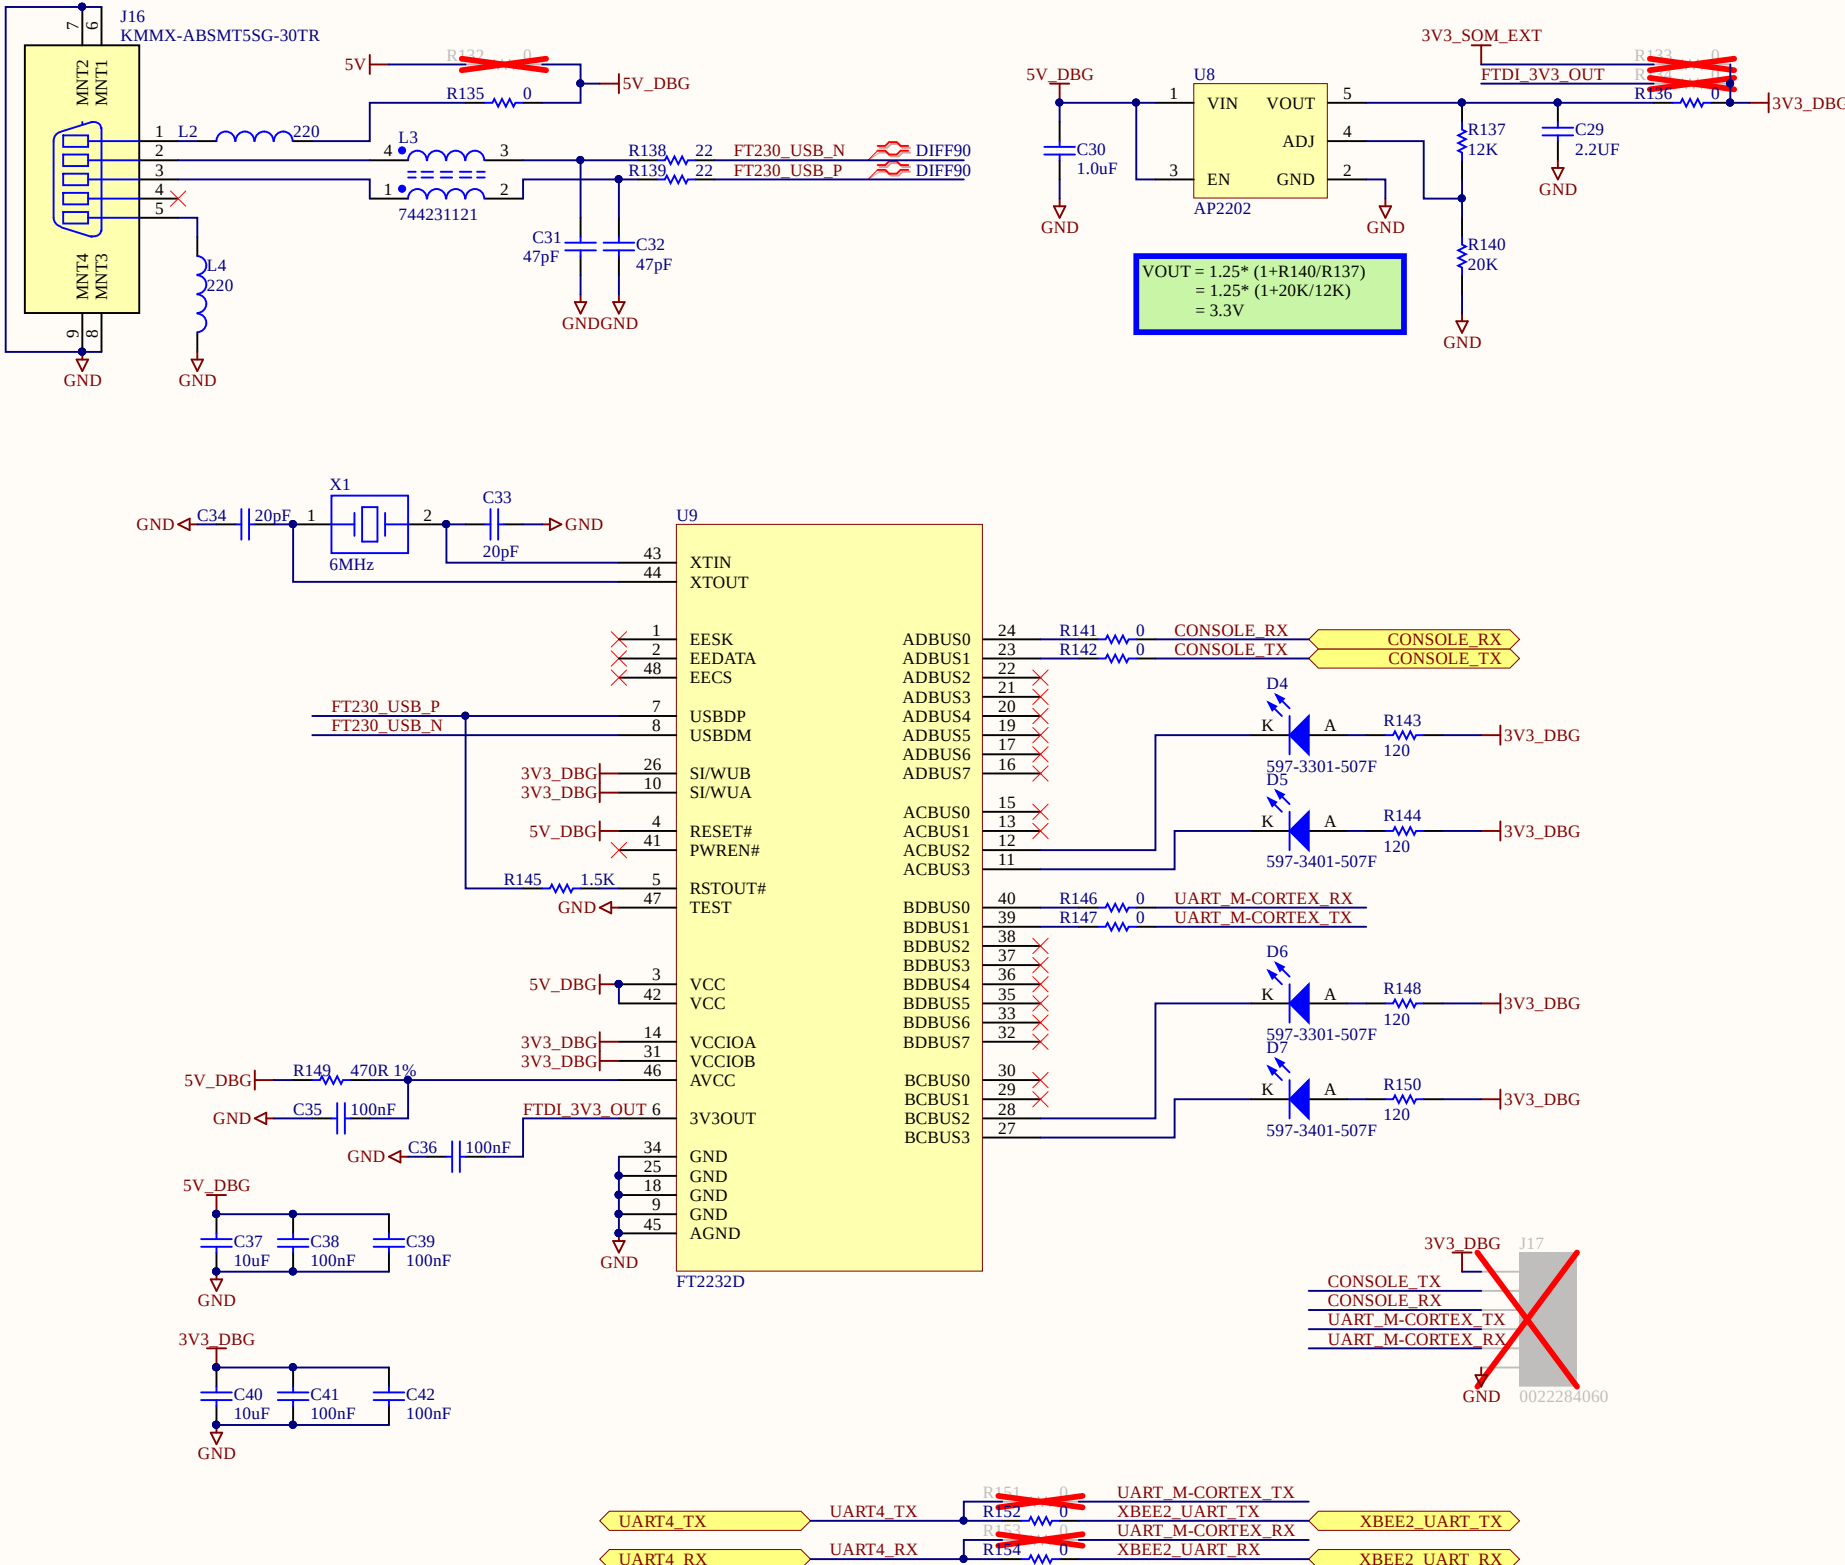


JTAG

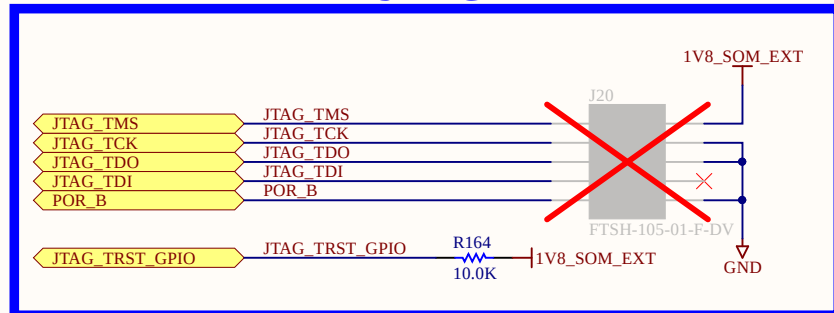


SWD

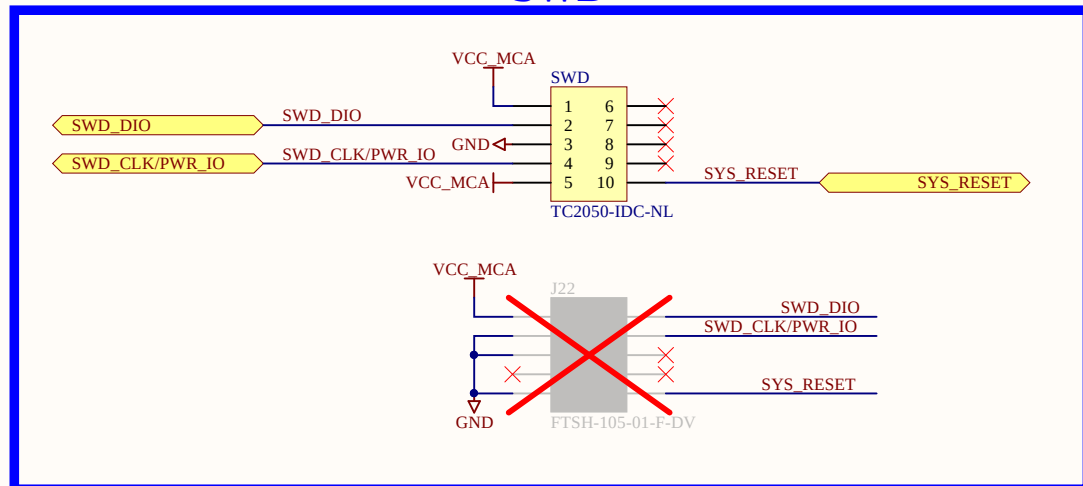


microSD

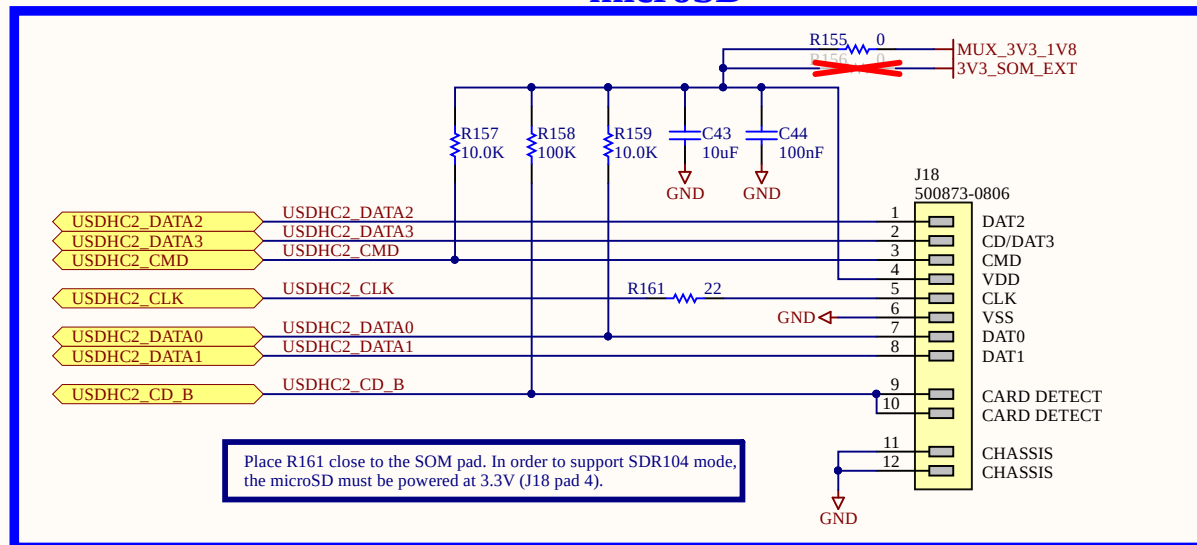


miniPCIe

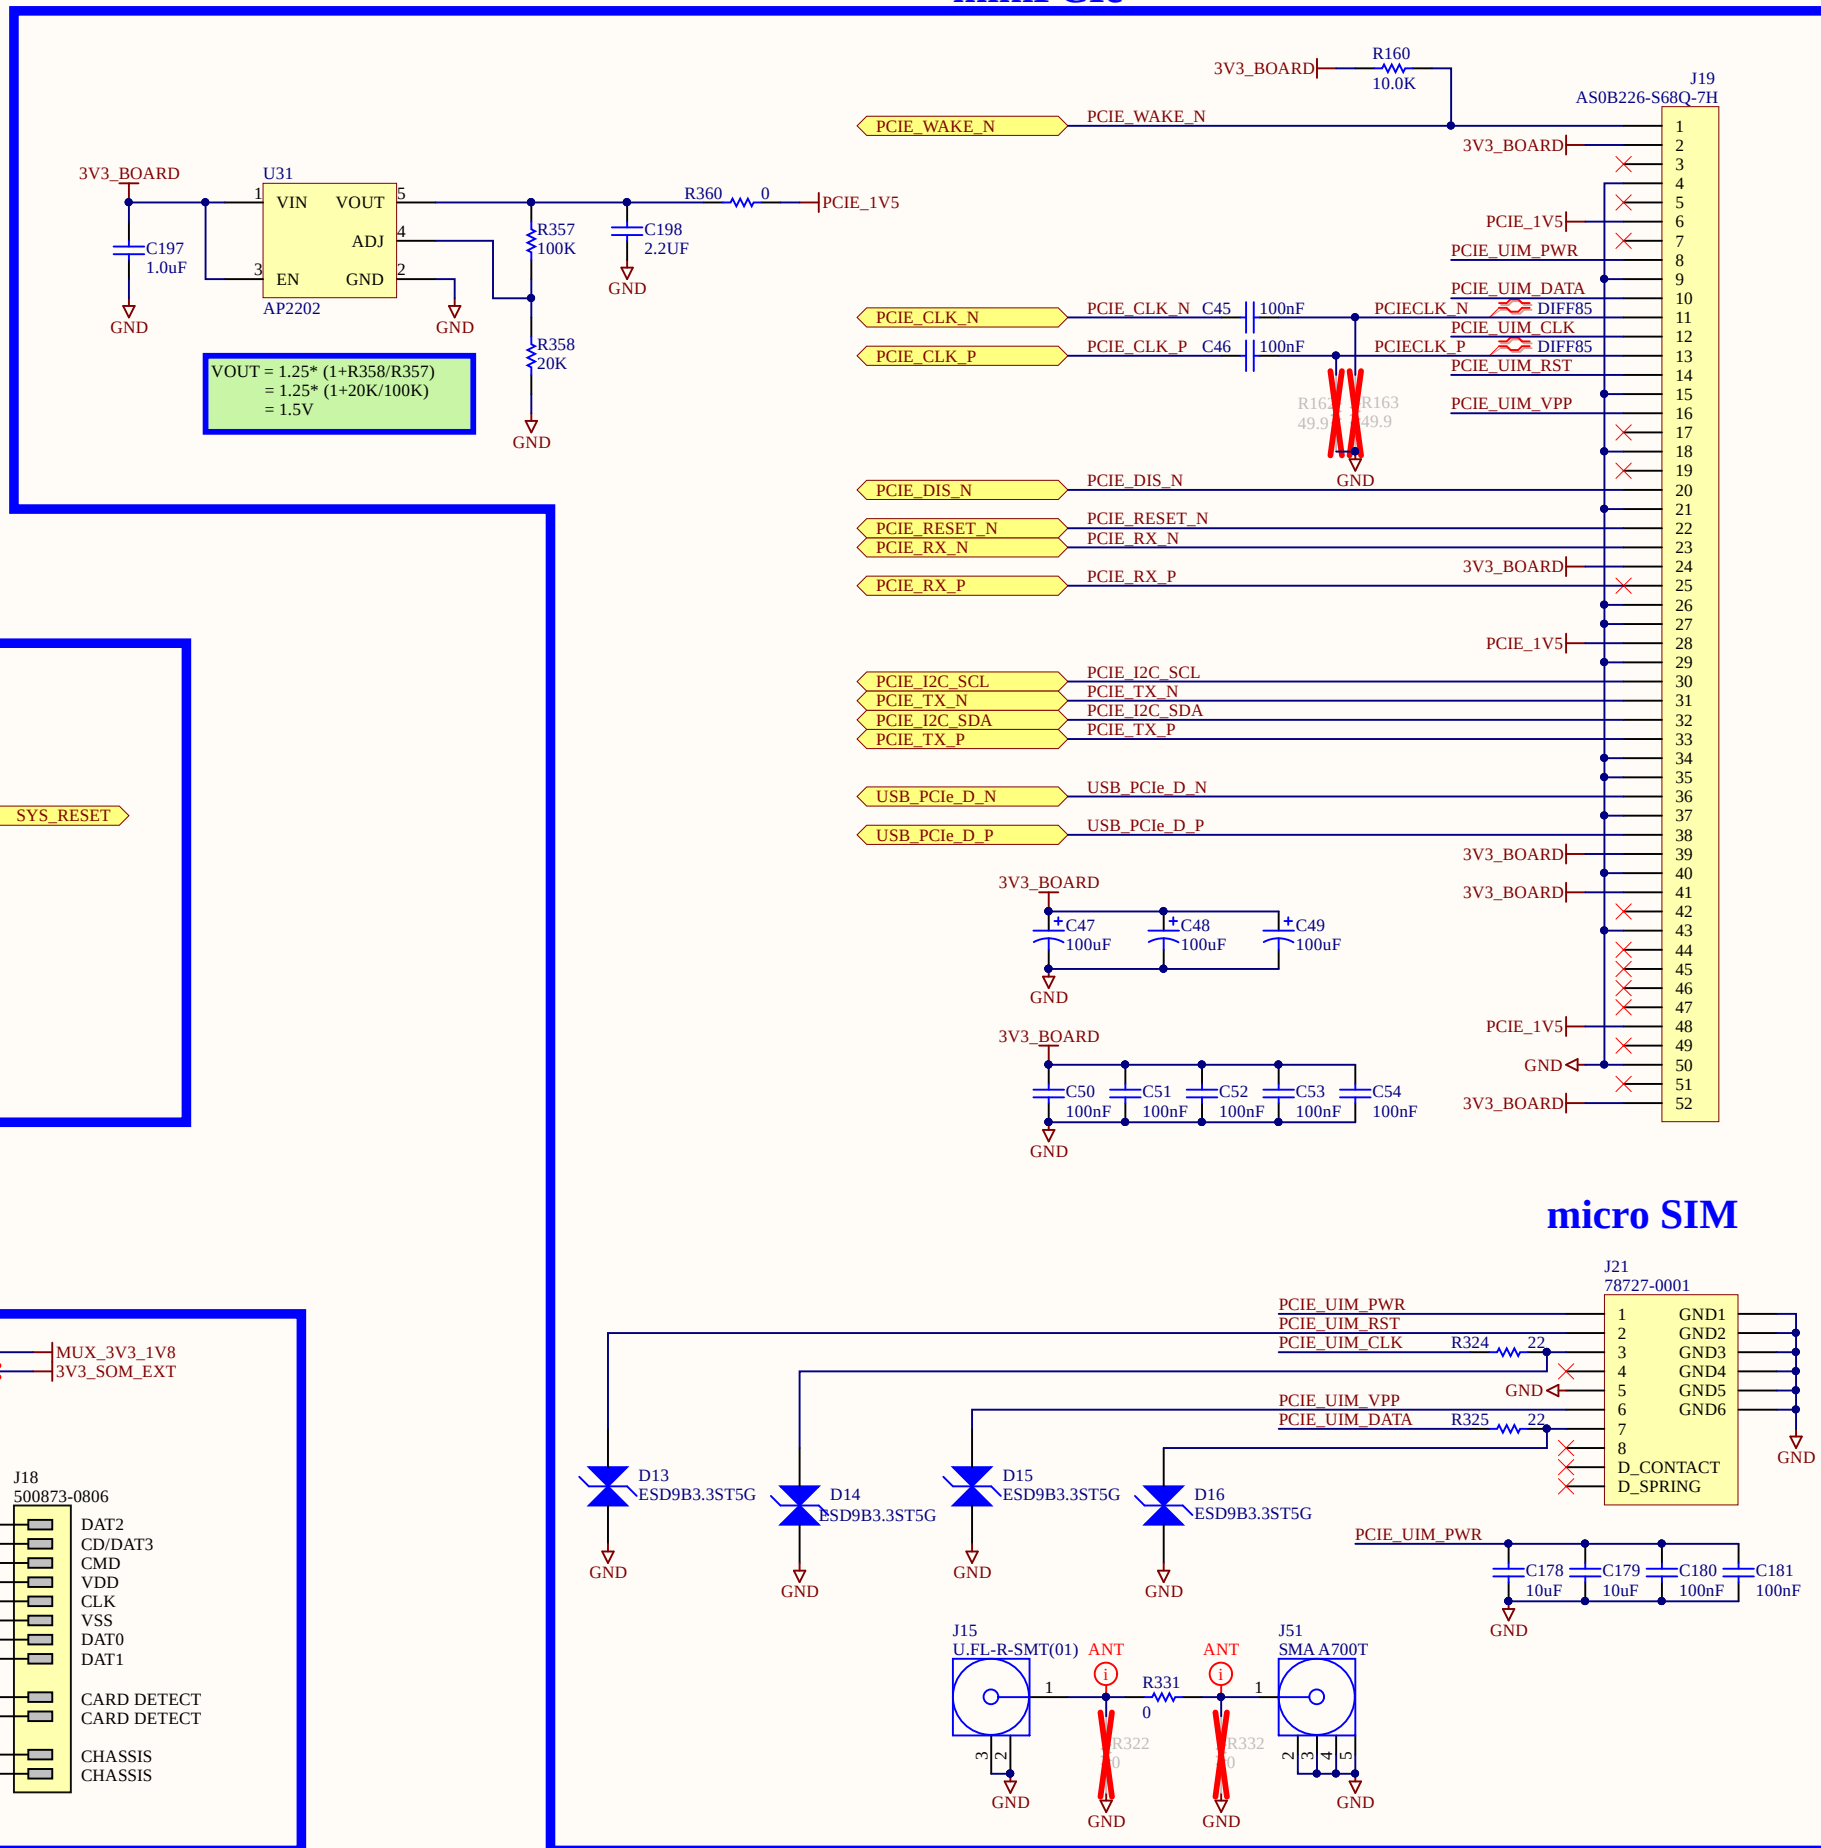


micro SIM

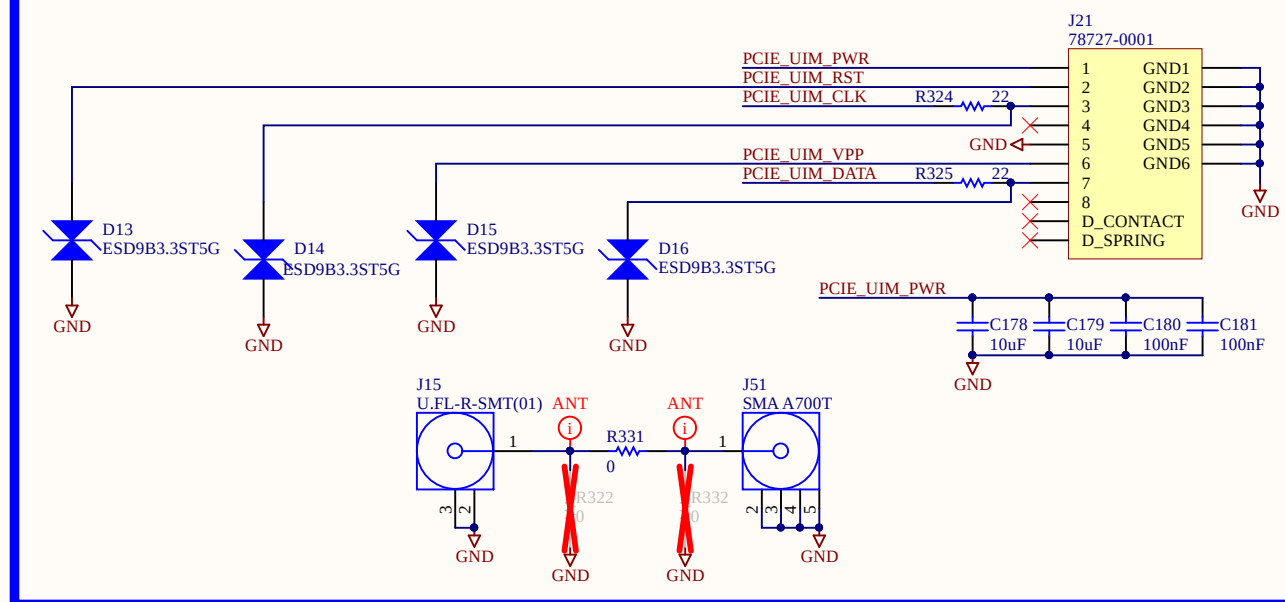


CAN

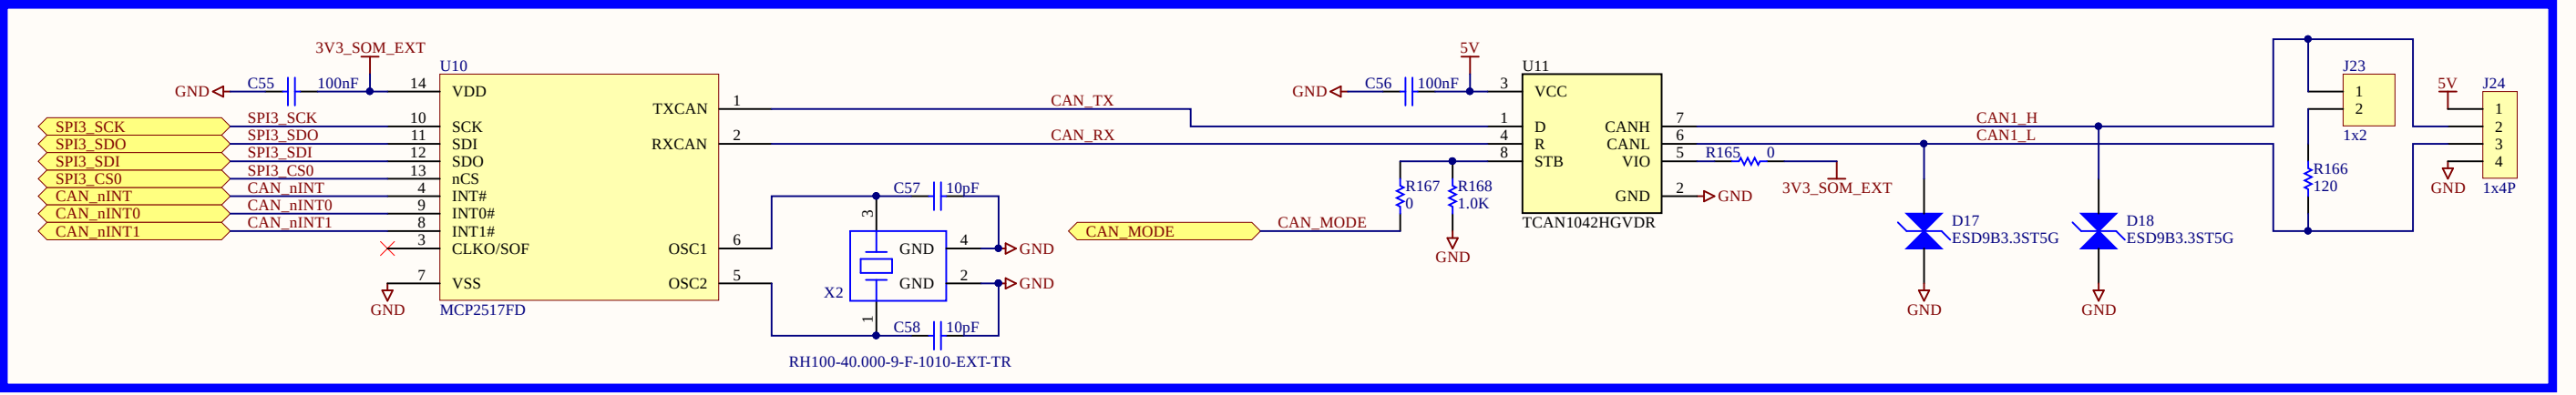

RS485

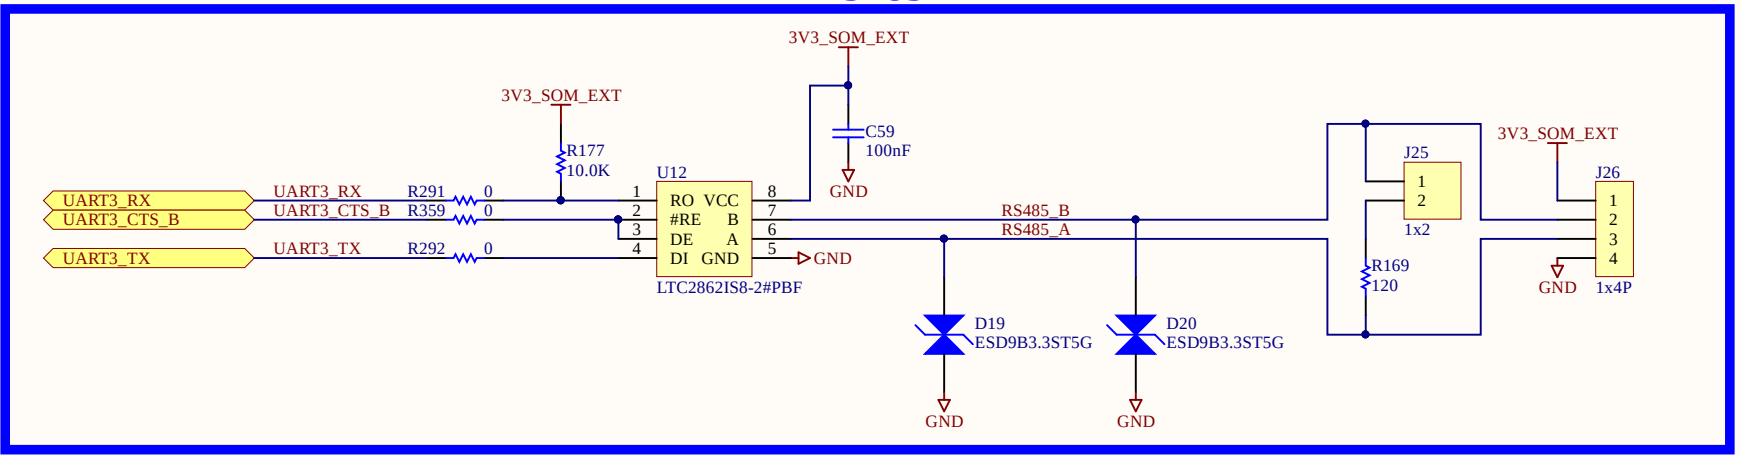


Gigabit Ethernet

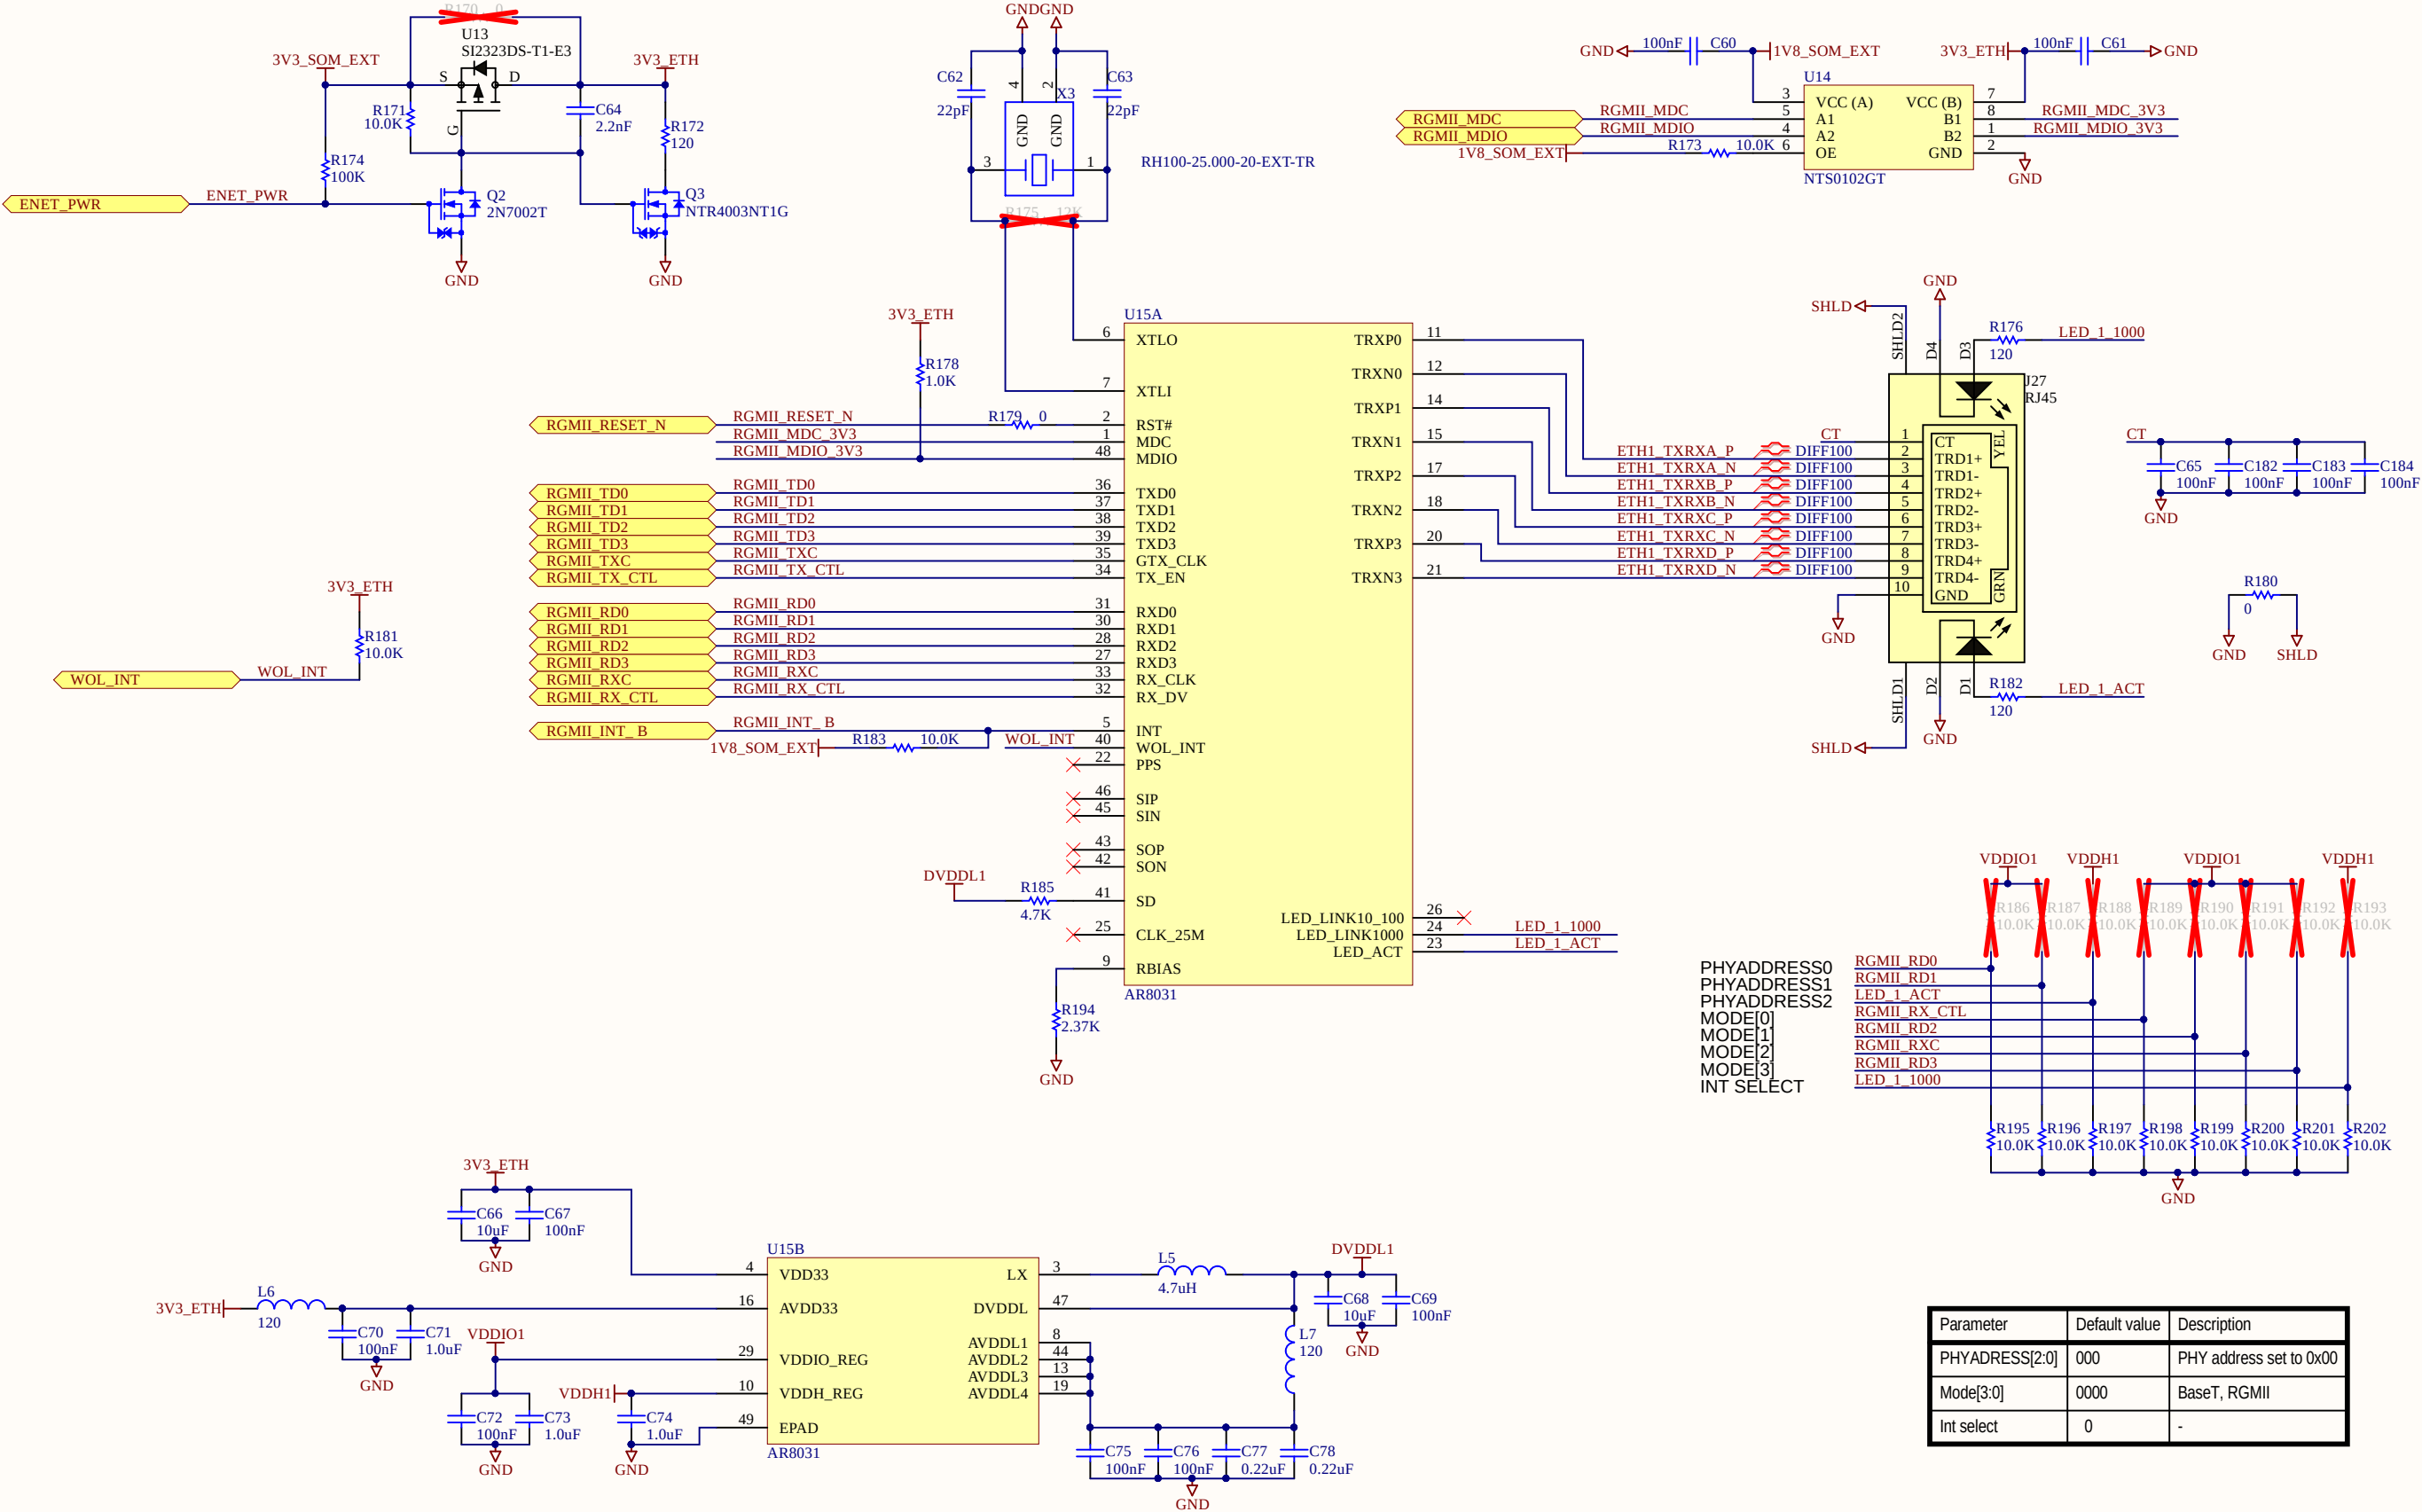


Parameter	Default value	Description
PHYADDRESS[2:0]	000	PHY address set to 0x00
Mode[3:0]	0000	BaseT, RGMII
Int select	0	-

MIPI Display switch

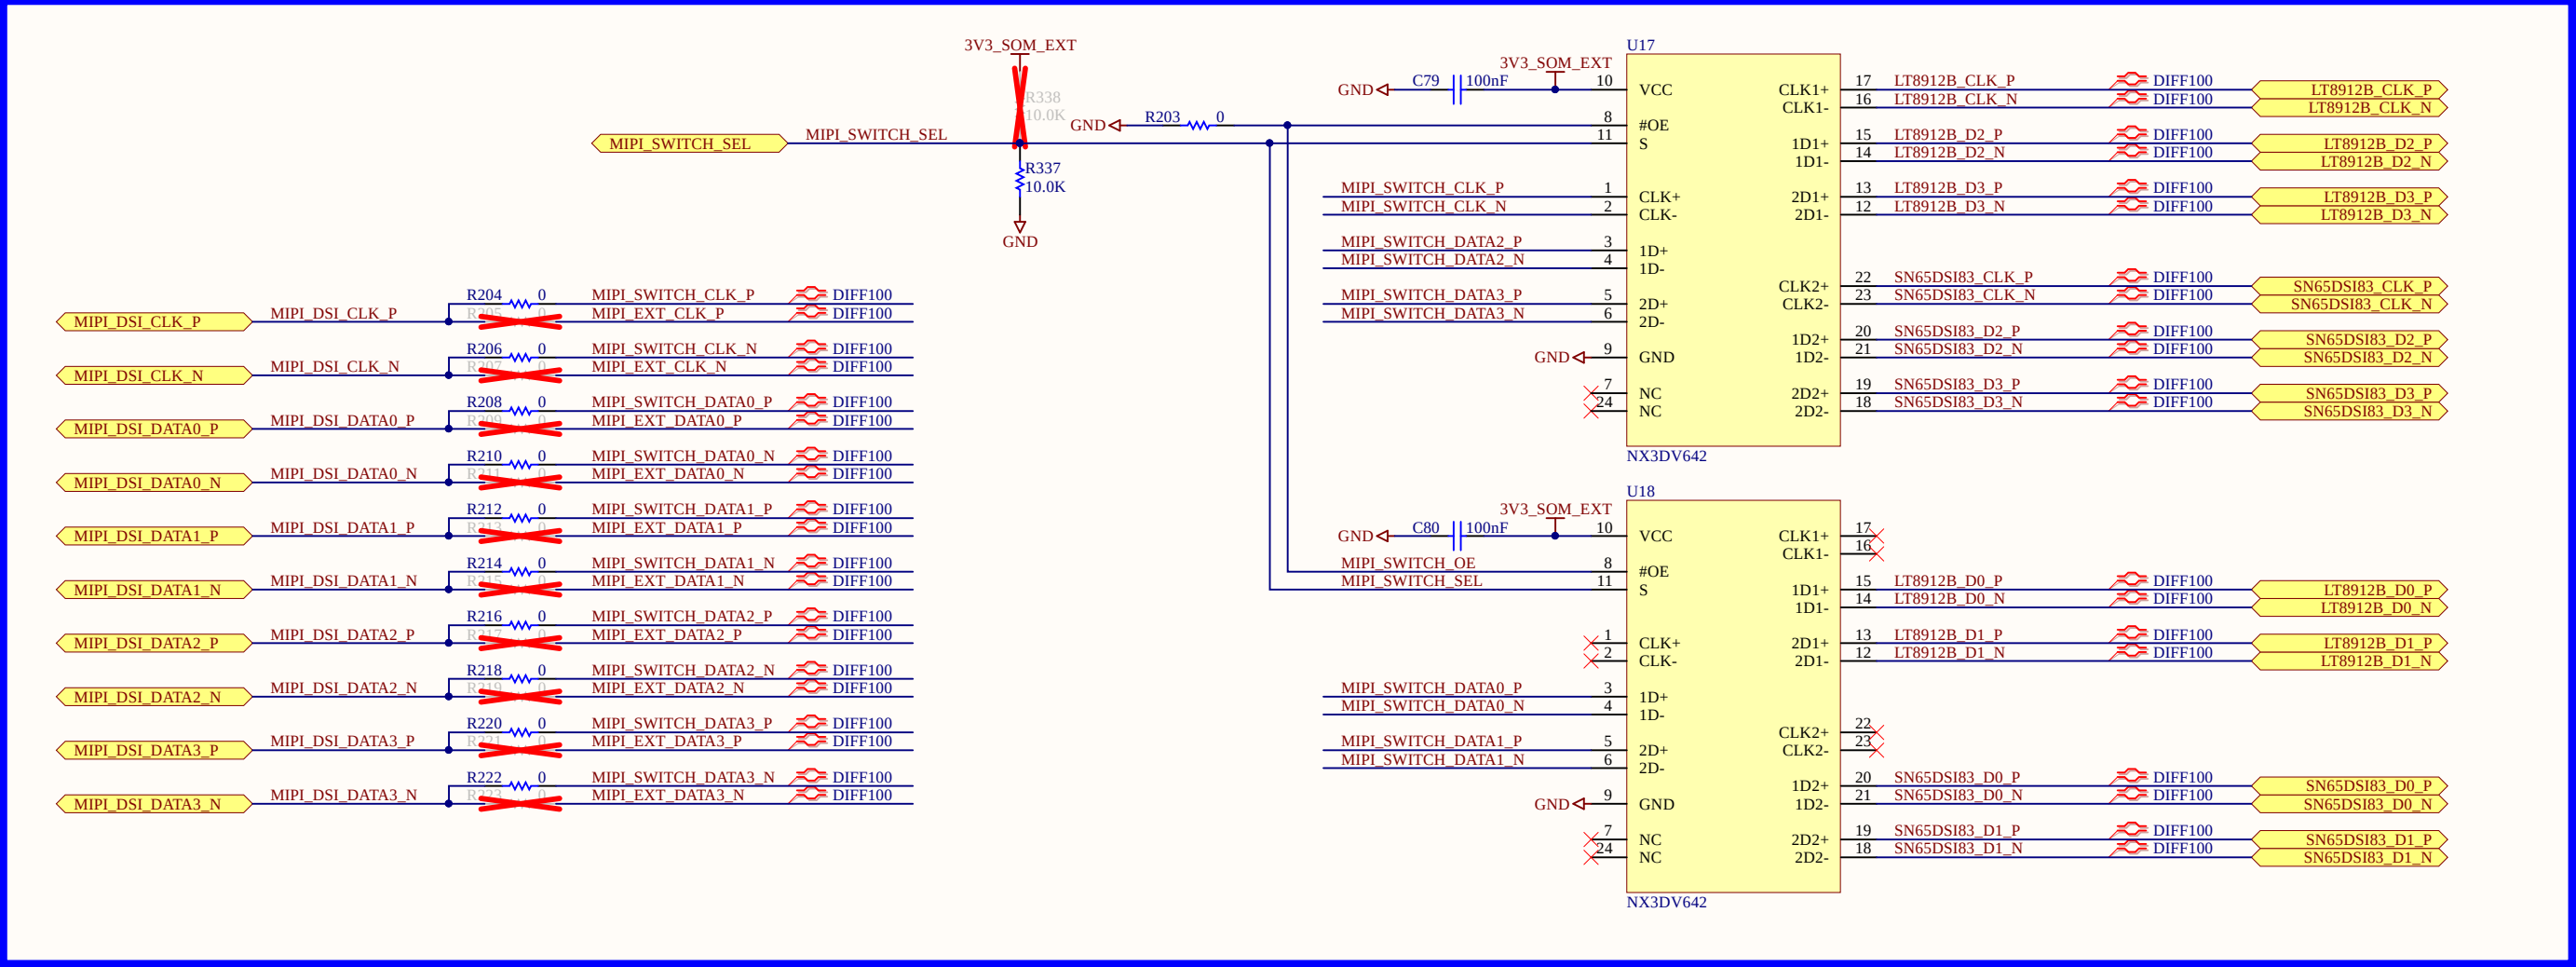


MIPI Camera

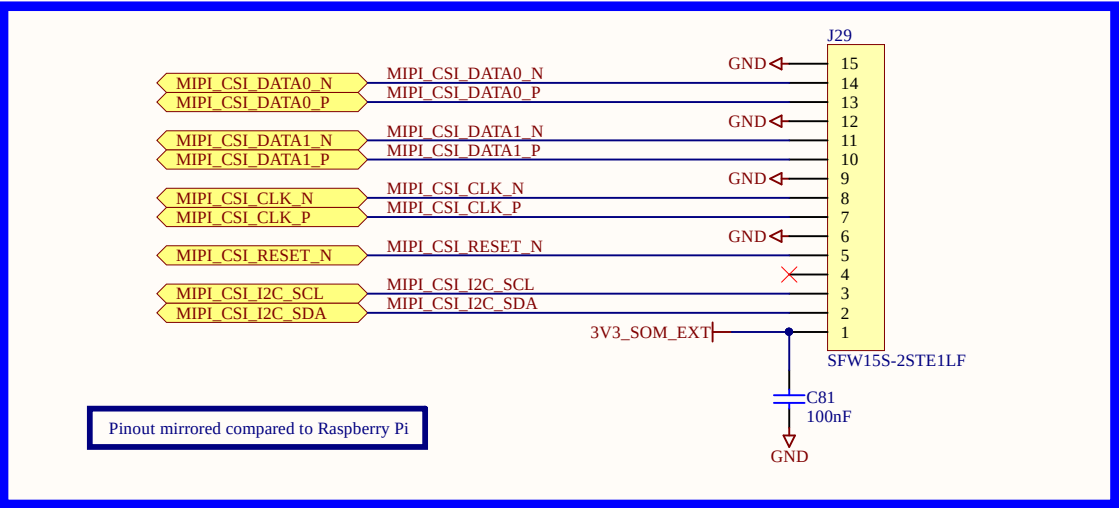

Pinout mirrored compared to Raspberry Pi

External MIPI display

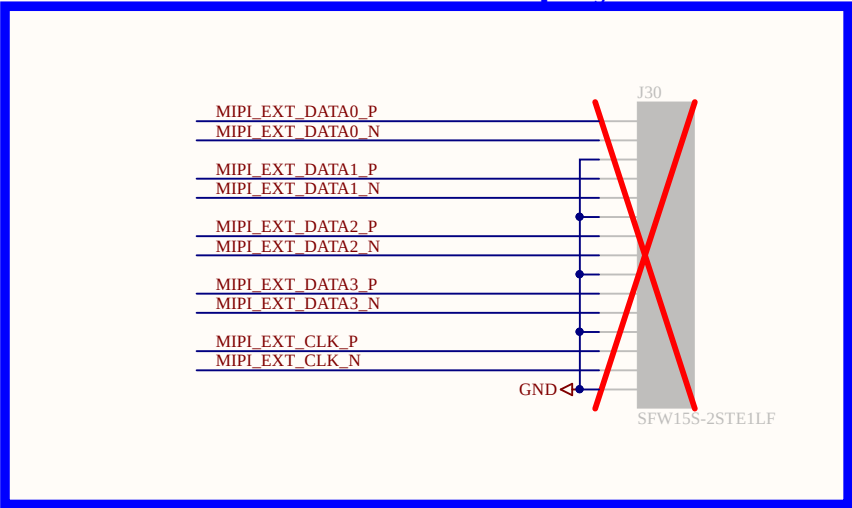

Title: MIPI display and switch, MIPI camera

Designer: Juan Anzola

Sheet: 12 of 21


Variant: 55002060-01

Rev: B


Description: ConnectCore i.MX8 8M Development board




U19A

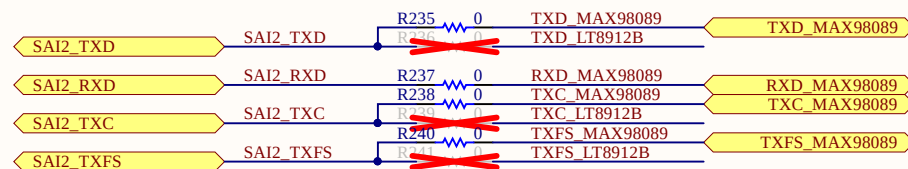


SN65DSI83 MIPI to LVDS bridge

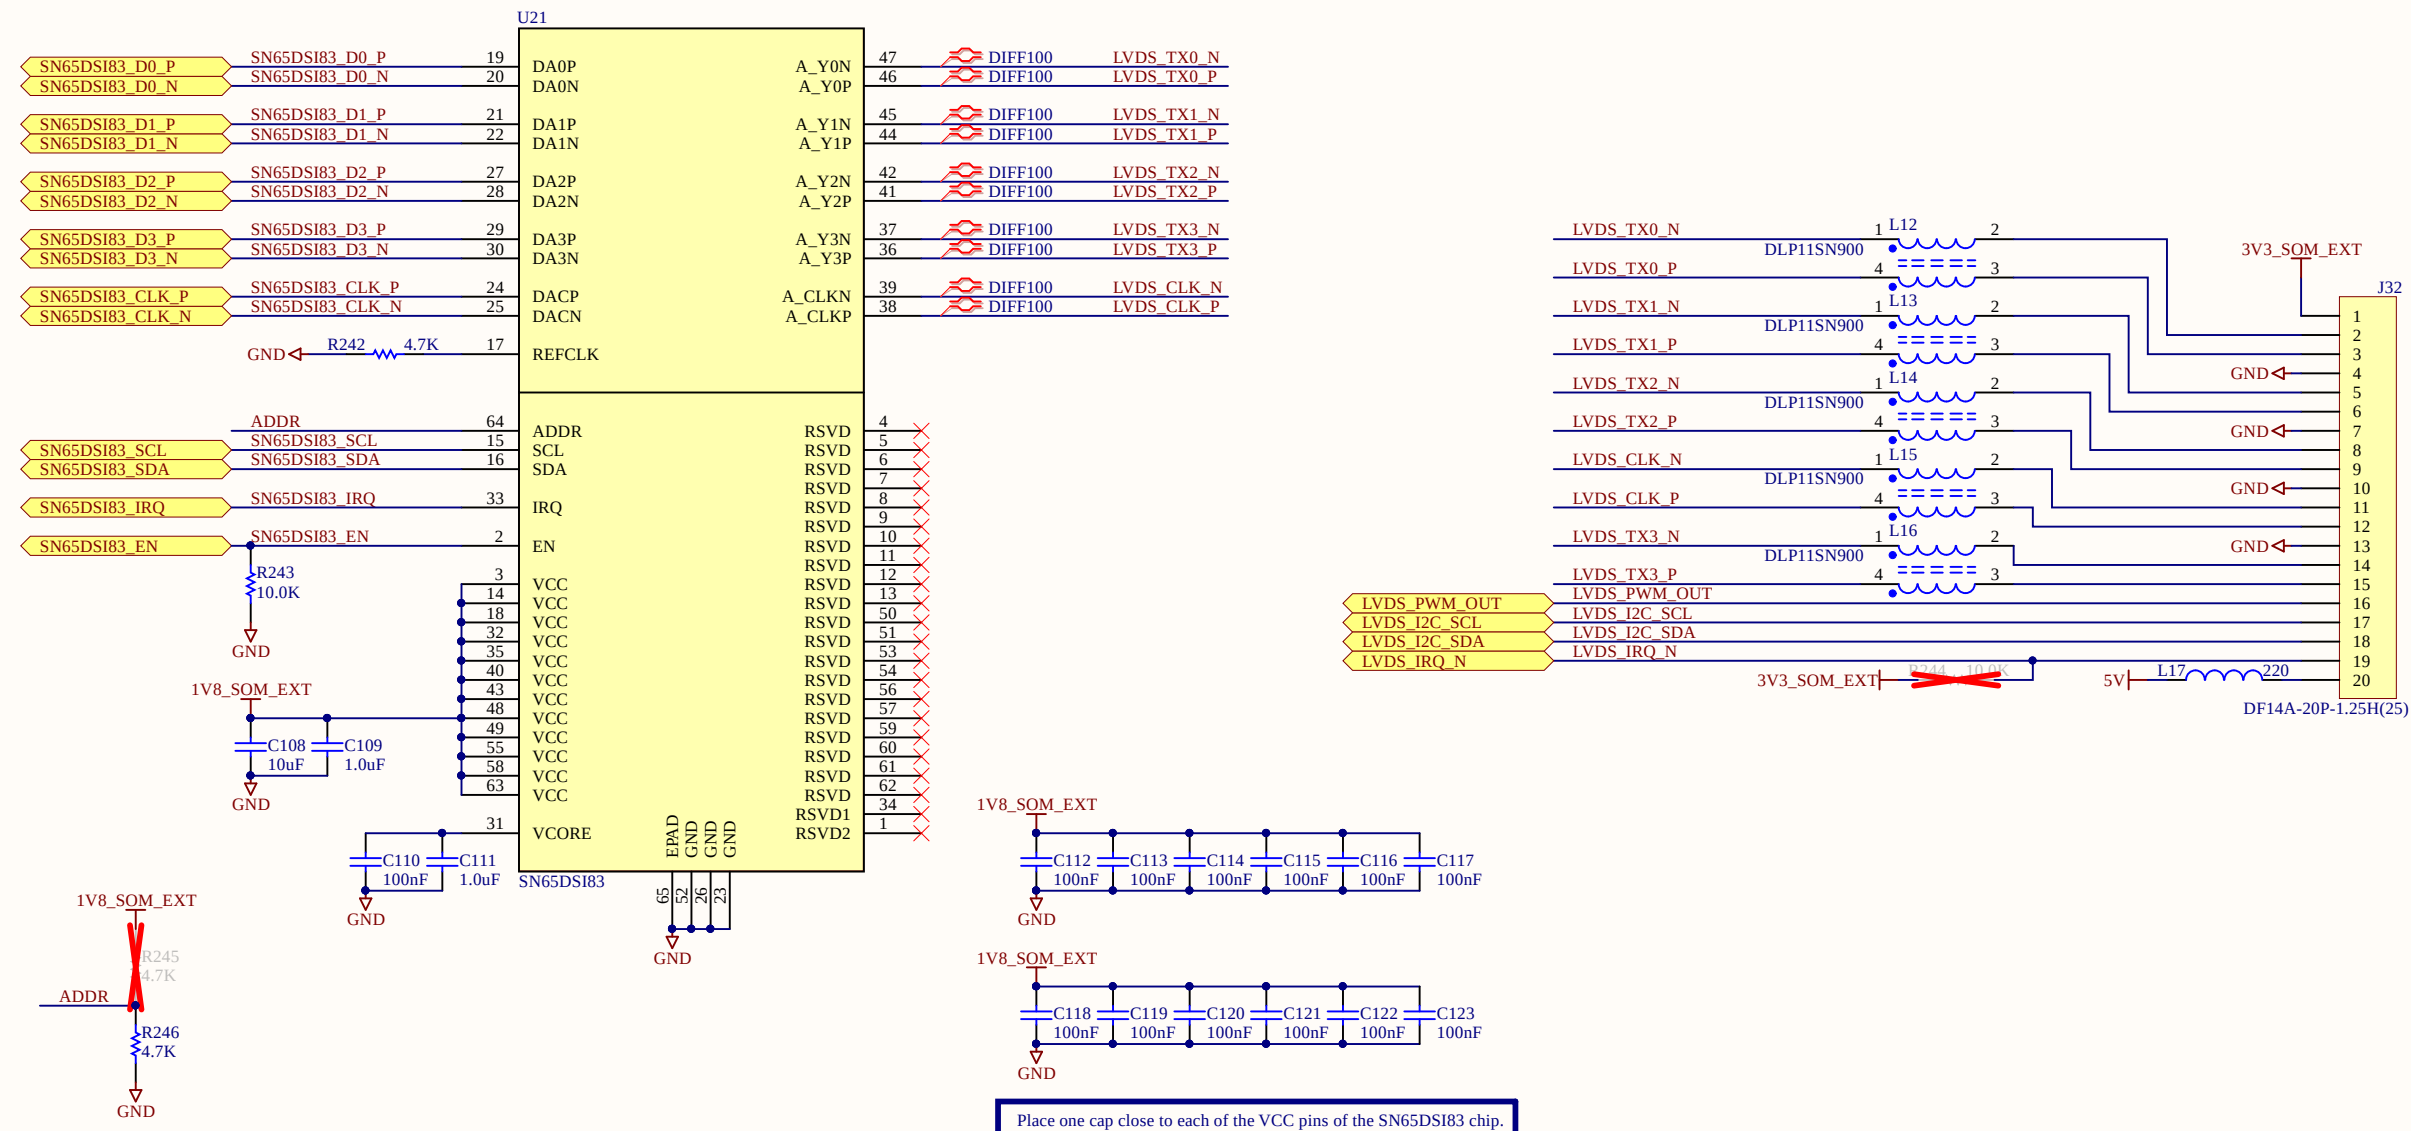


USB HOST

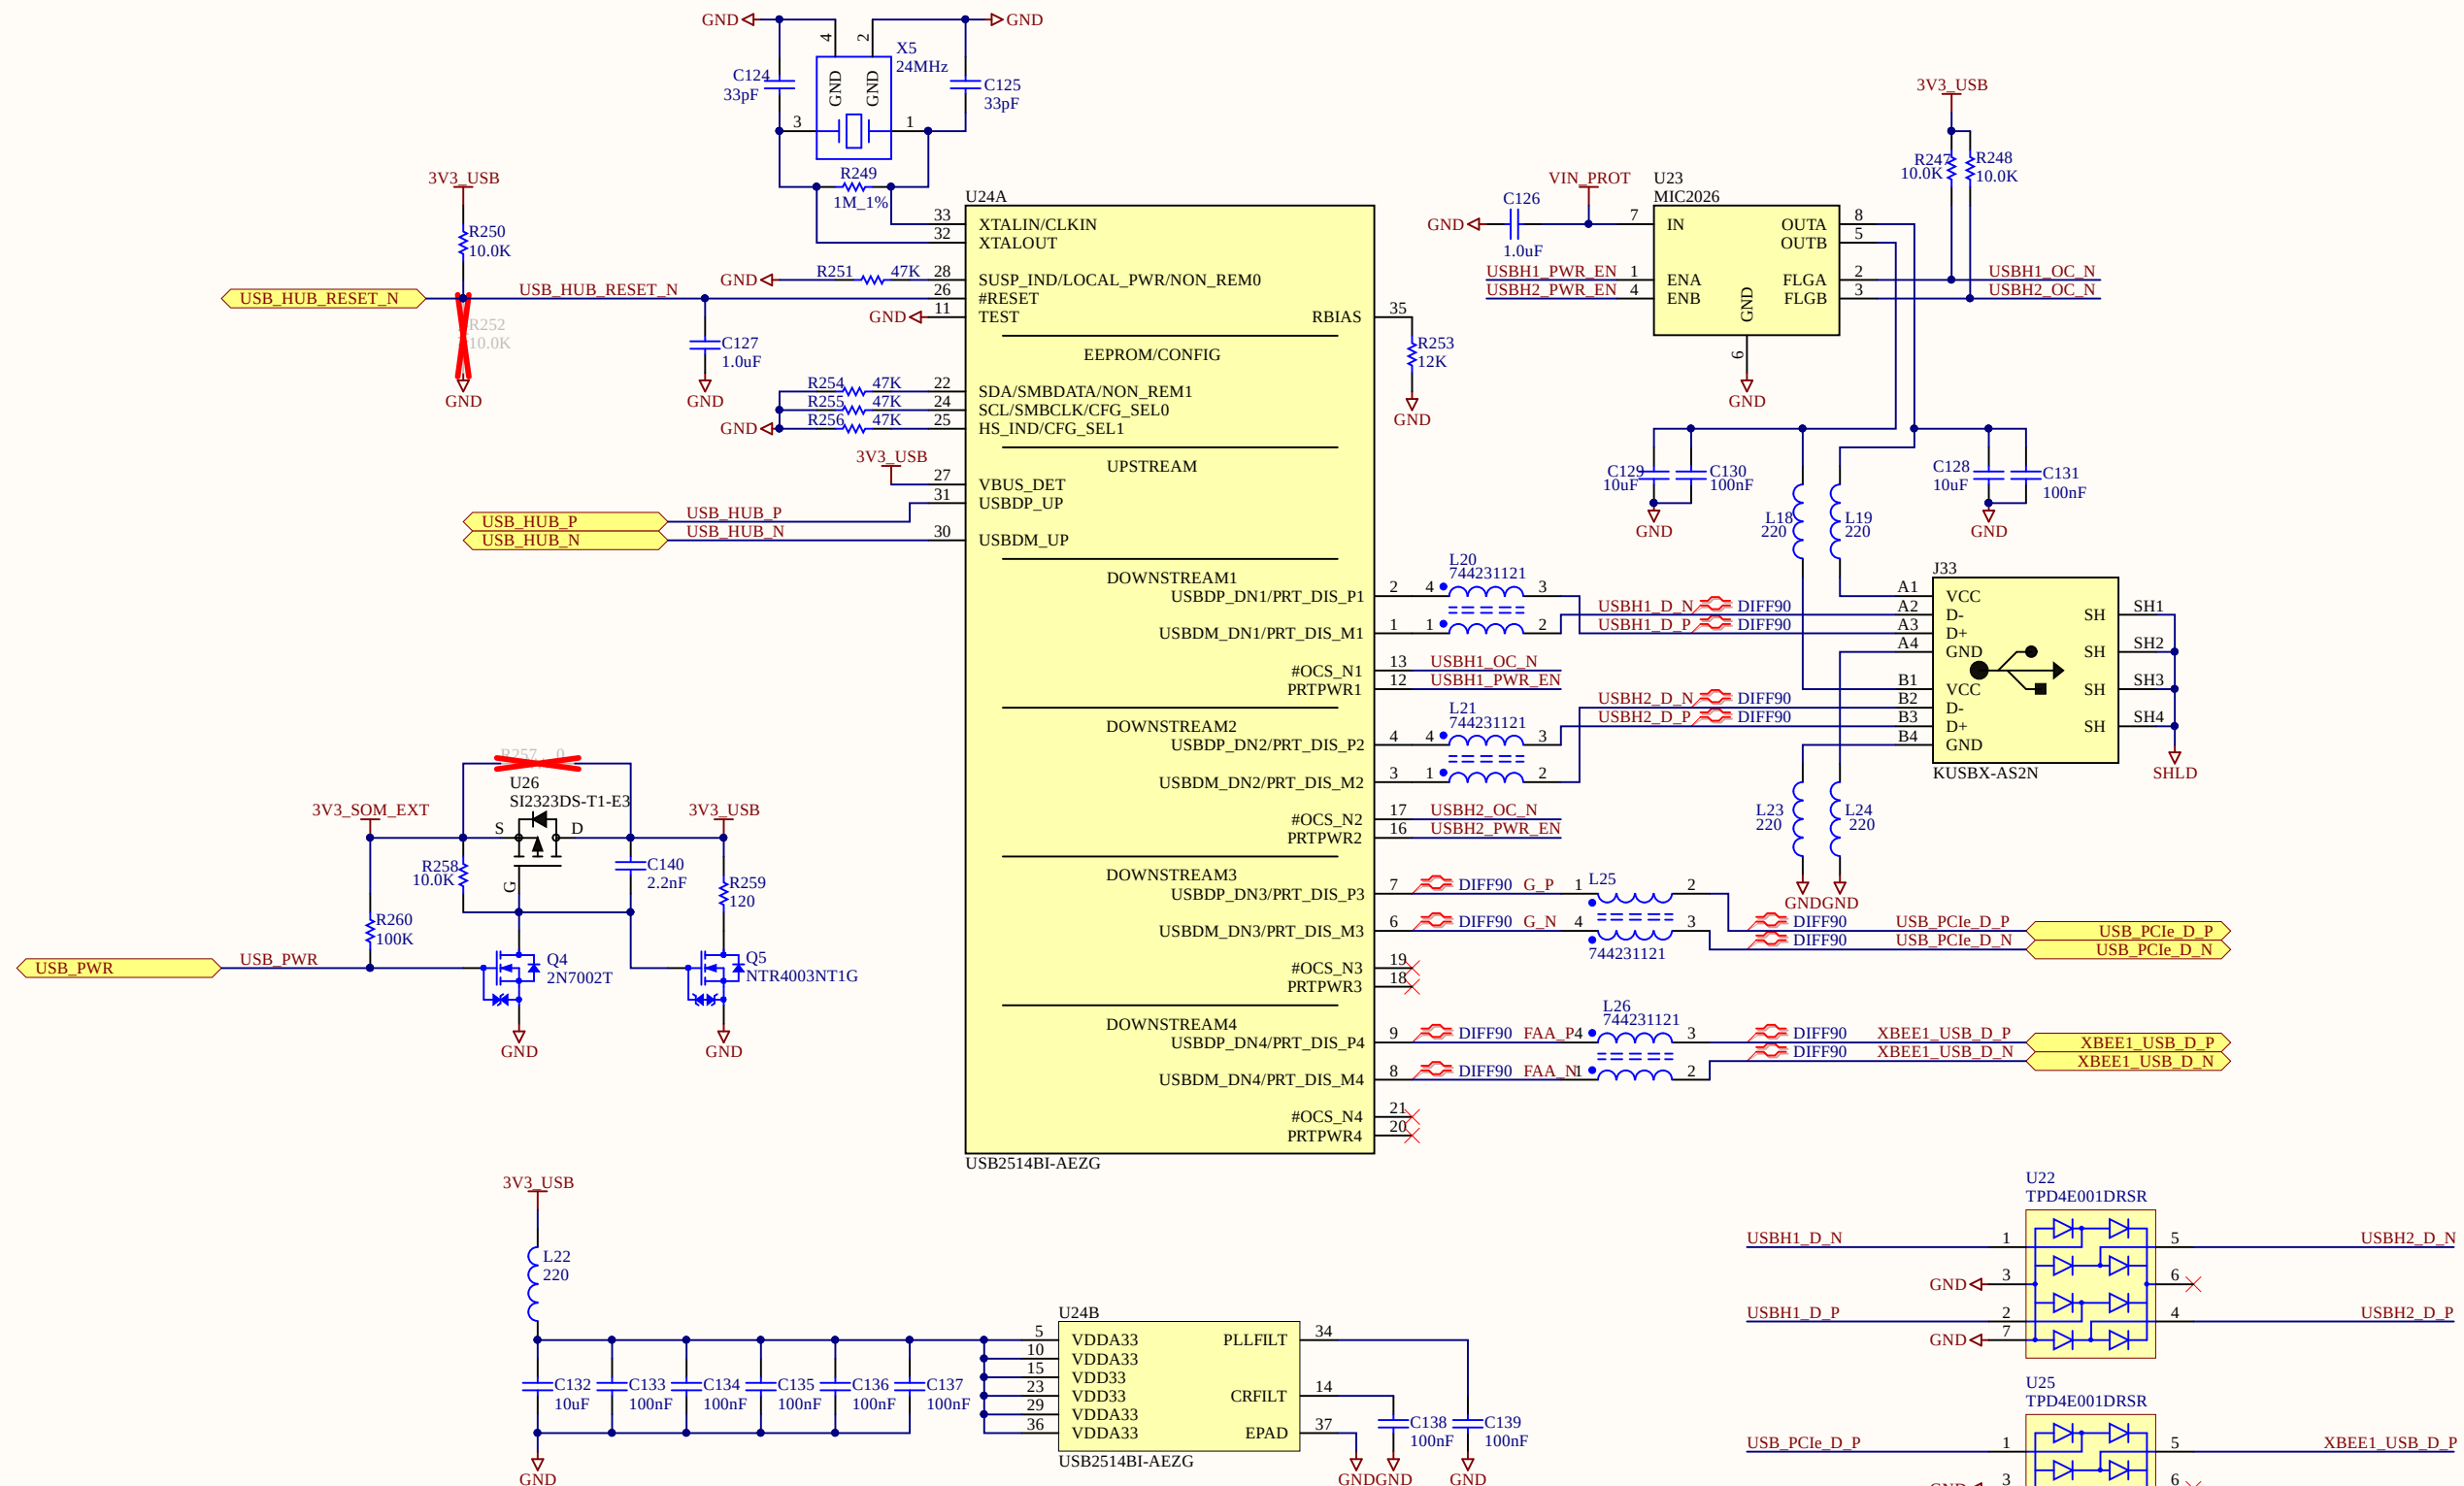


USB Recovery / OTG

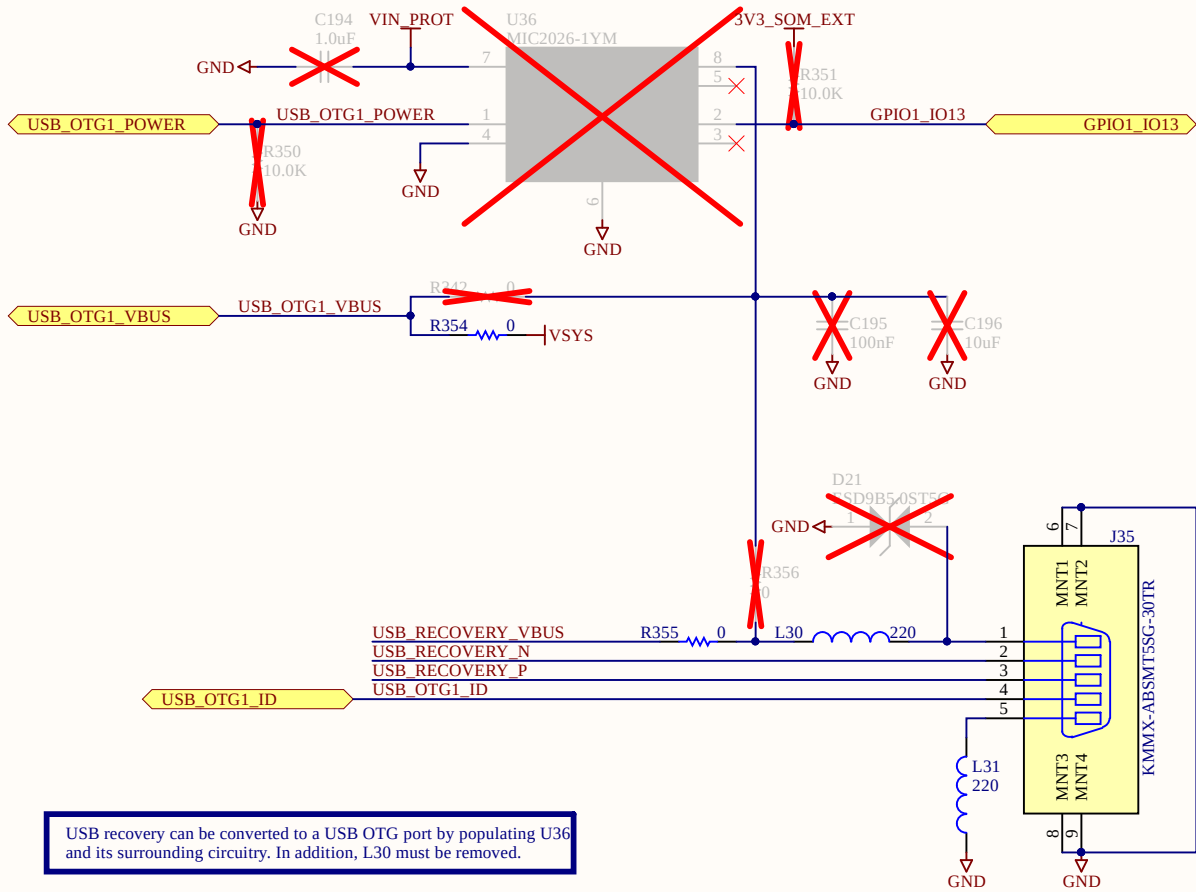

USB recovery can be converted to a USB OTG port by populating U36 and its surrounding circuitry. In addition, L30 must be removed.




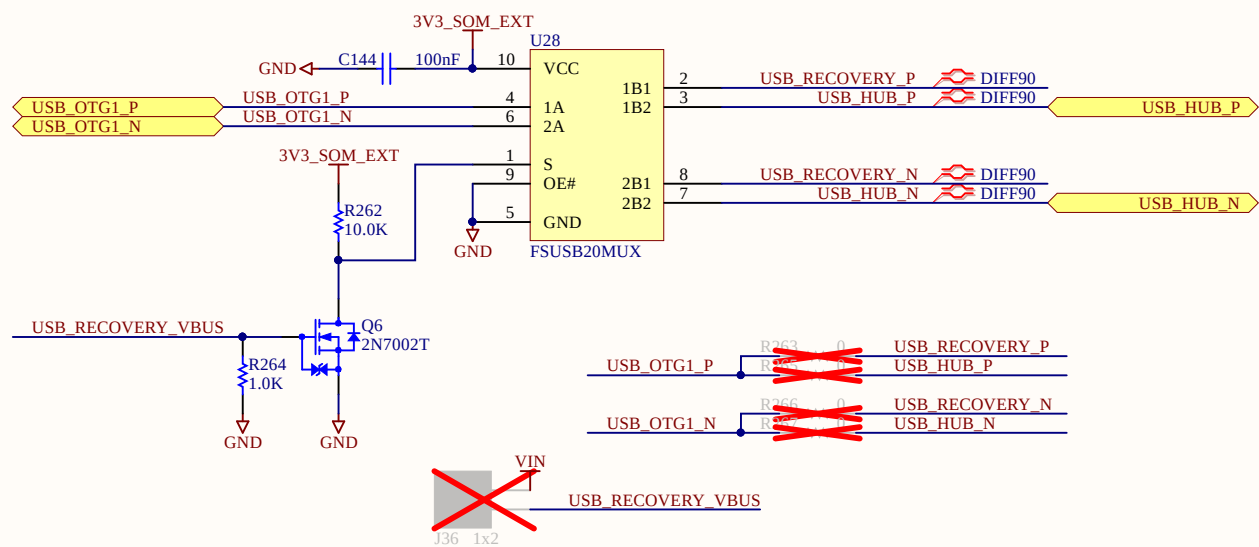


USB OTG

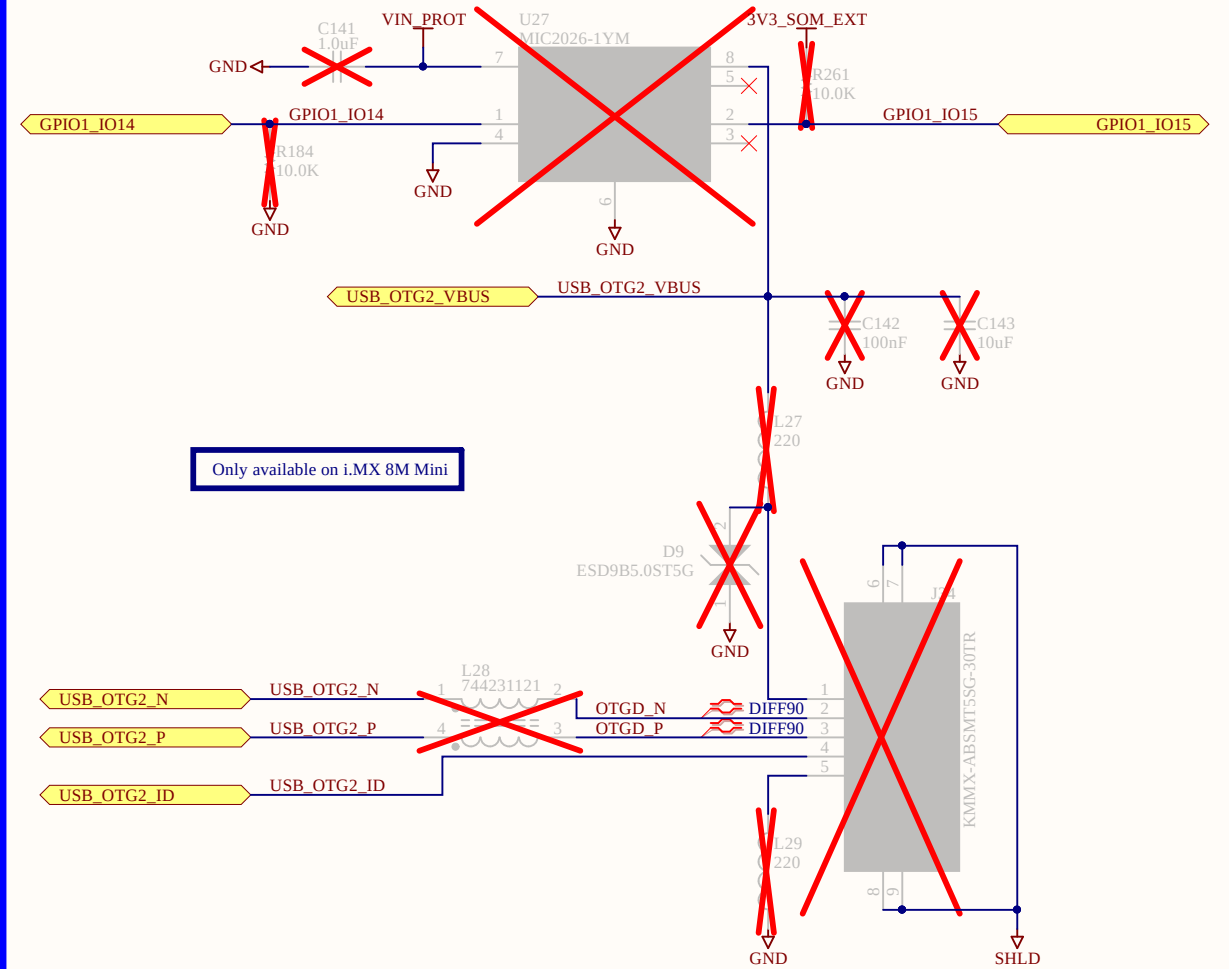


Only available on i.MX 8M Mini

AUDIO

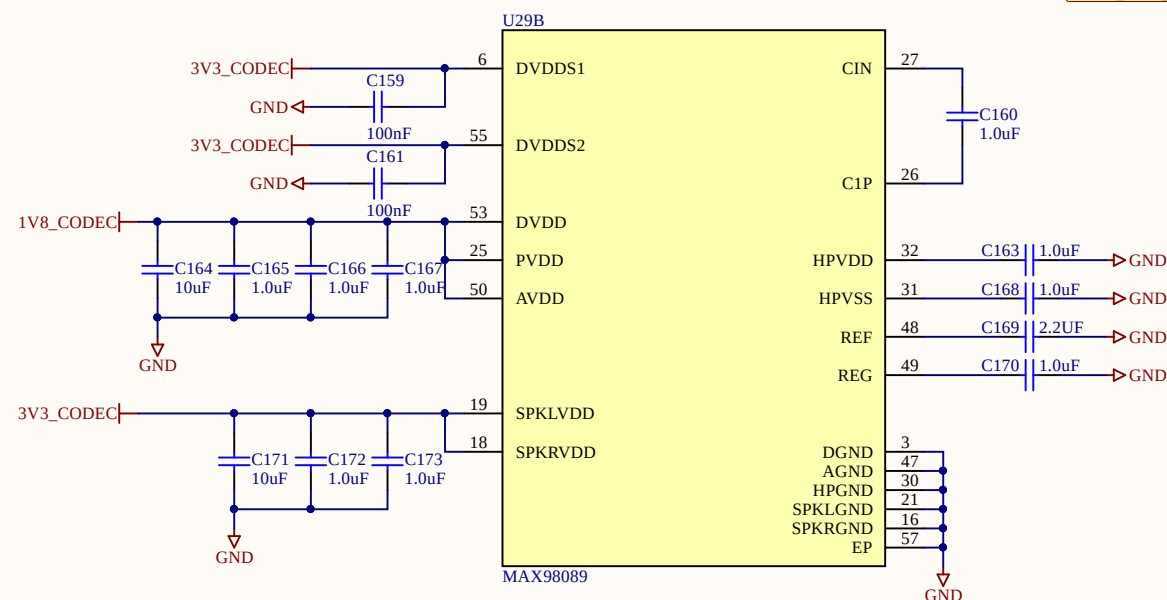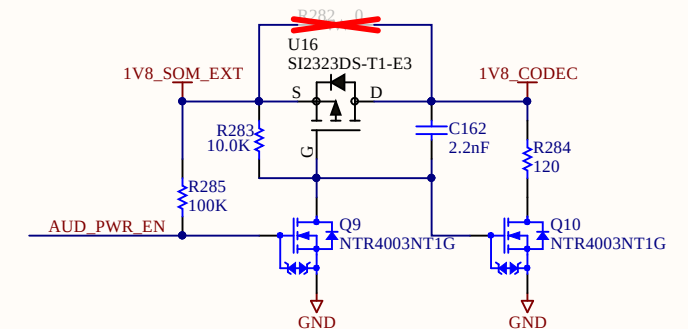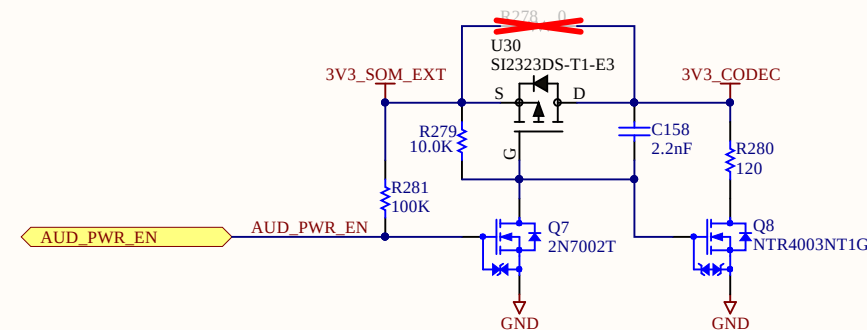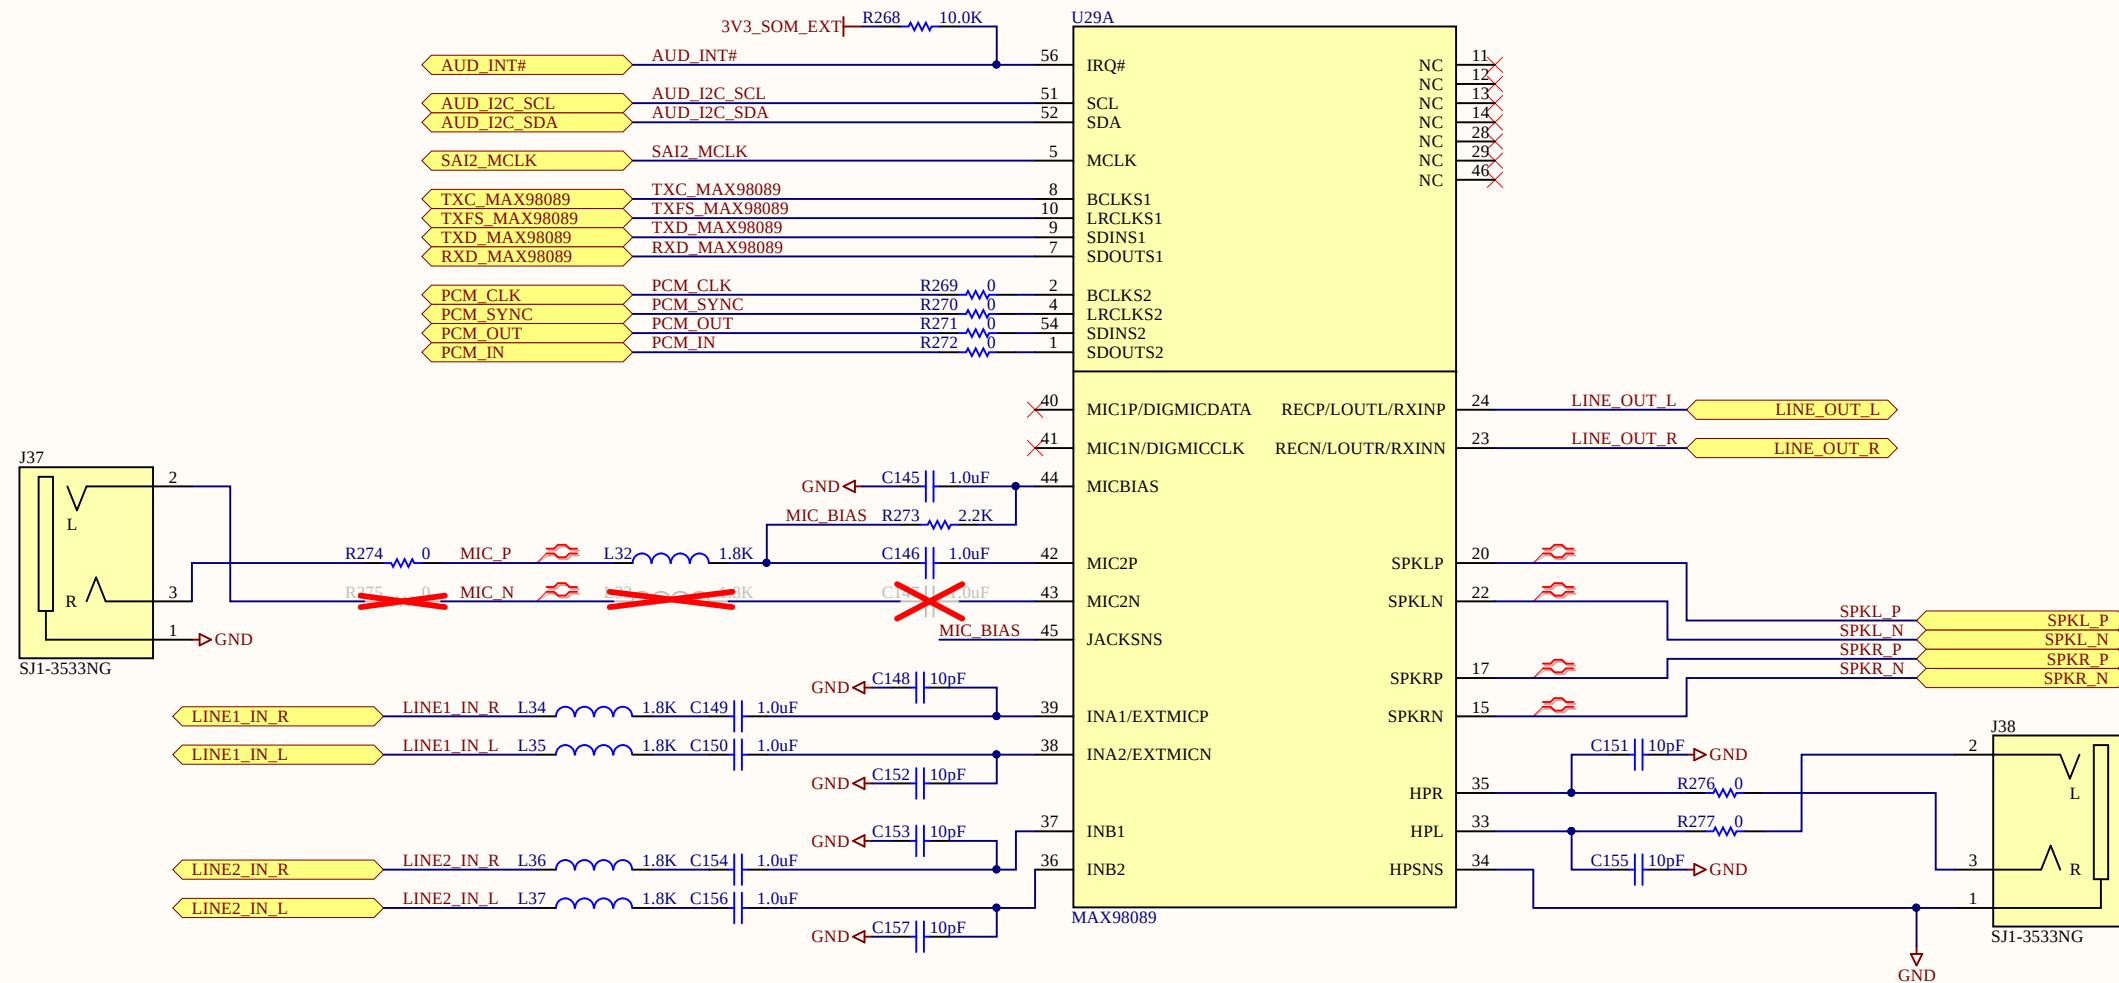


Title: Audio		
Designer: Juan Anzola	Sheet: 17 of 21	
Variant: 55002060-01	Rev: B	
Description: ConnectCore i.MX8 8M Development board		


I2C

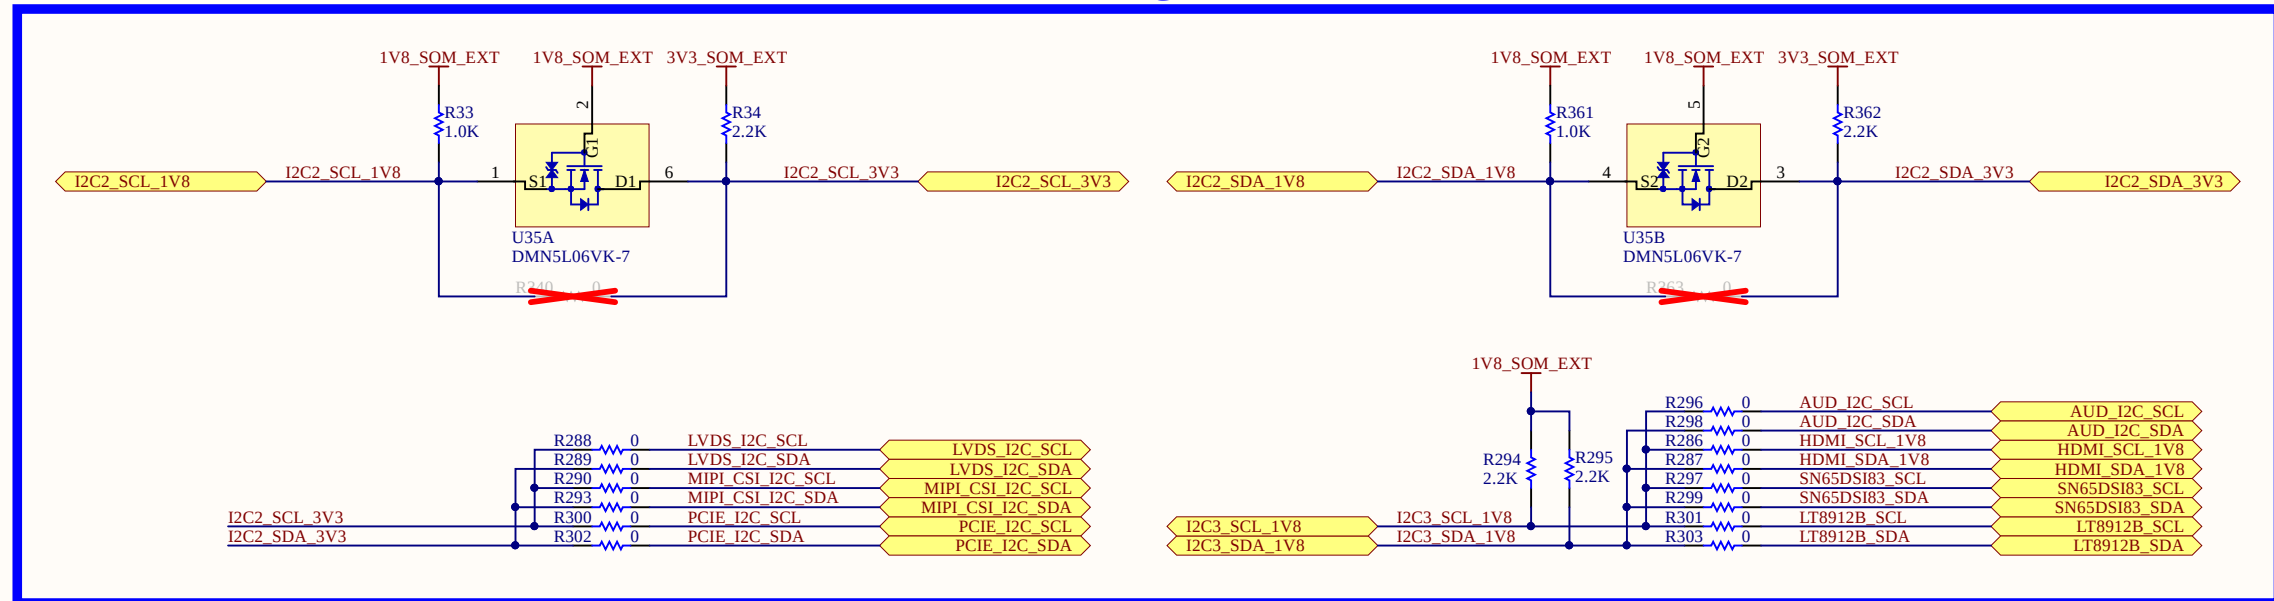


XBee Cellular

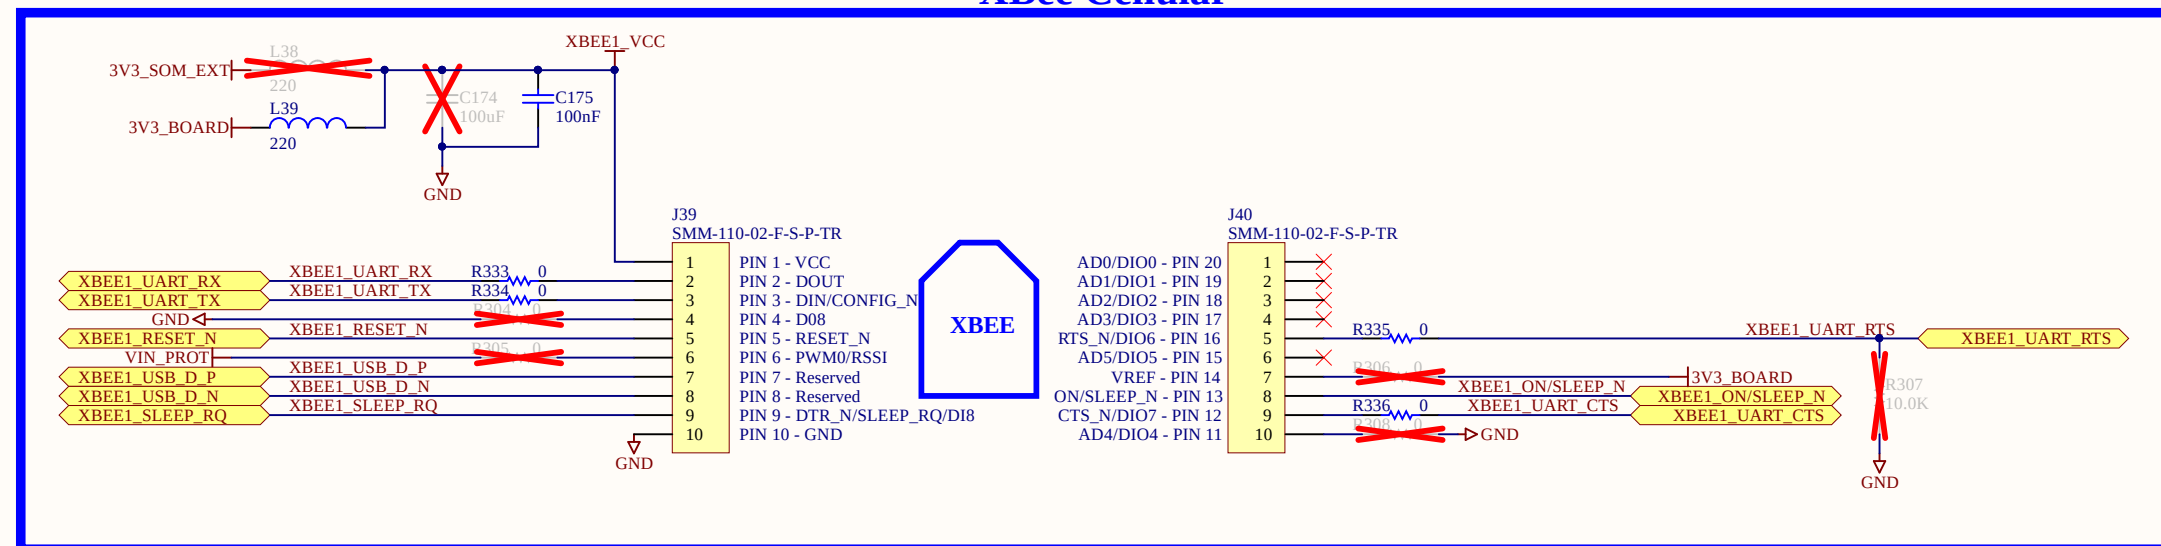


XBee User

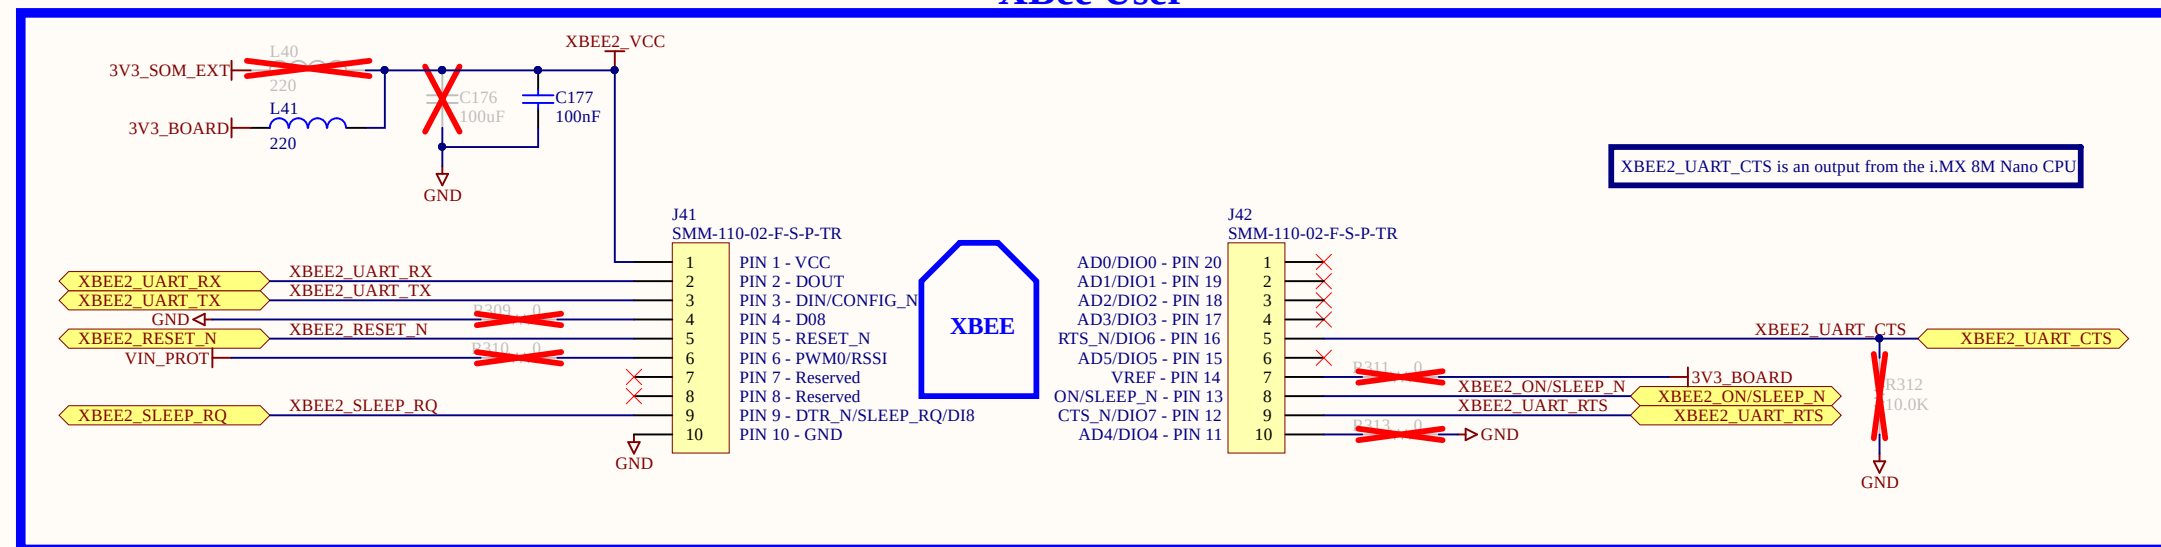

Expansion connectors

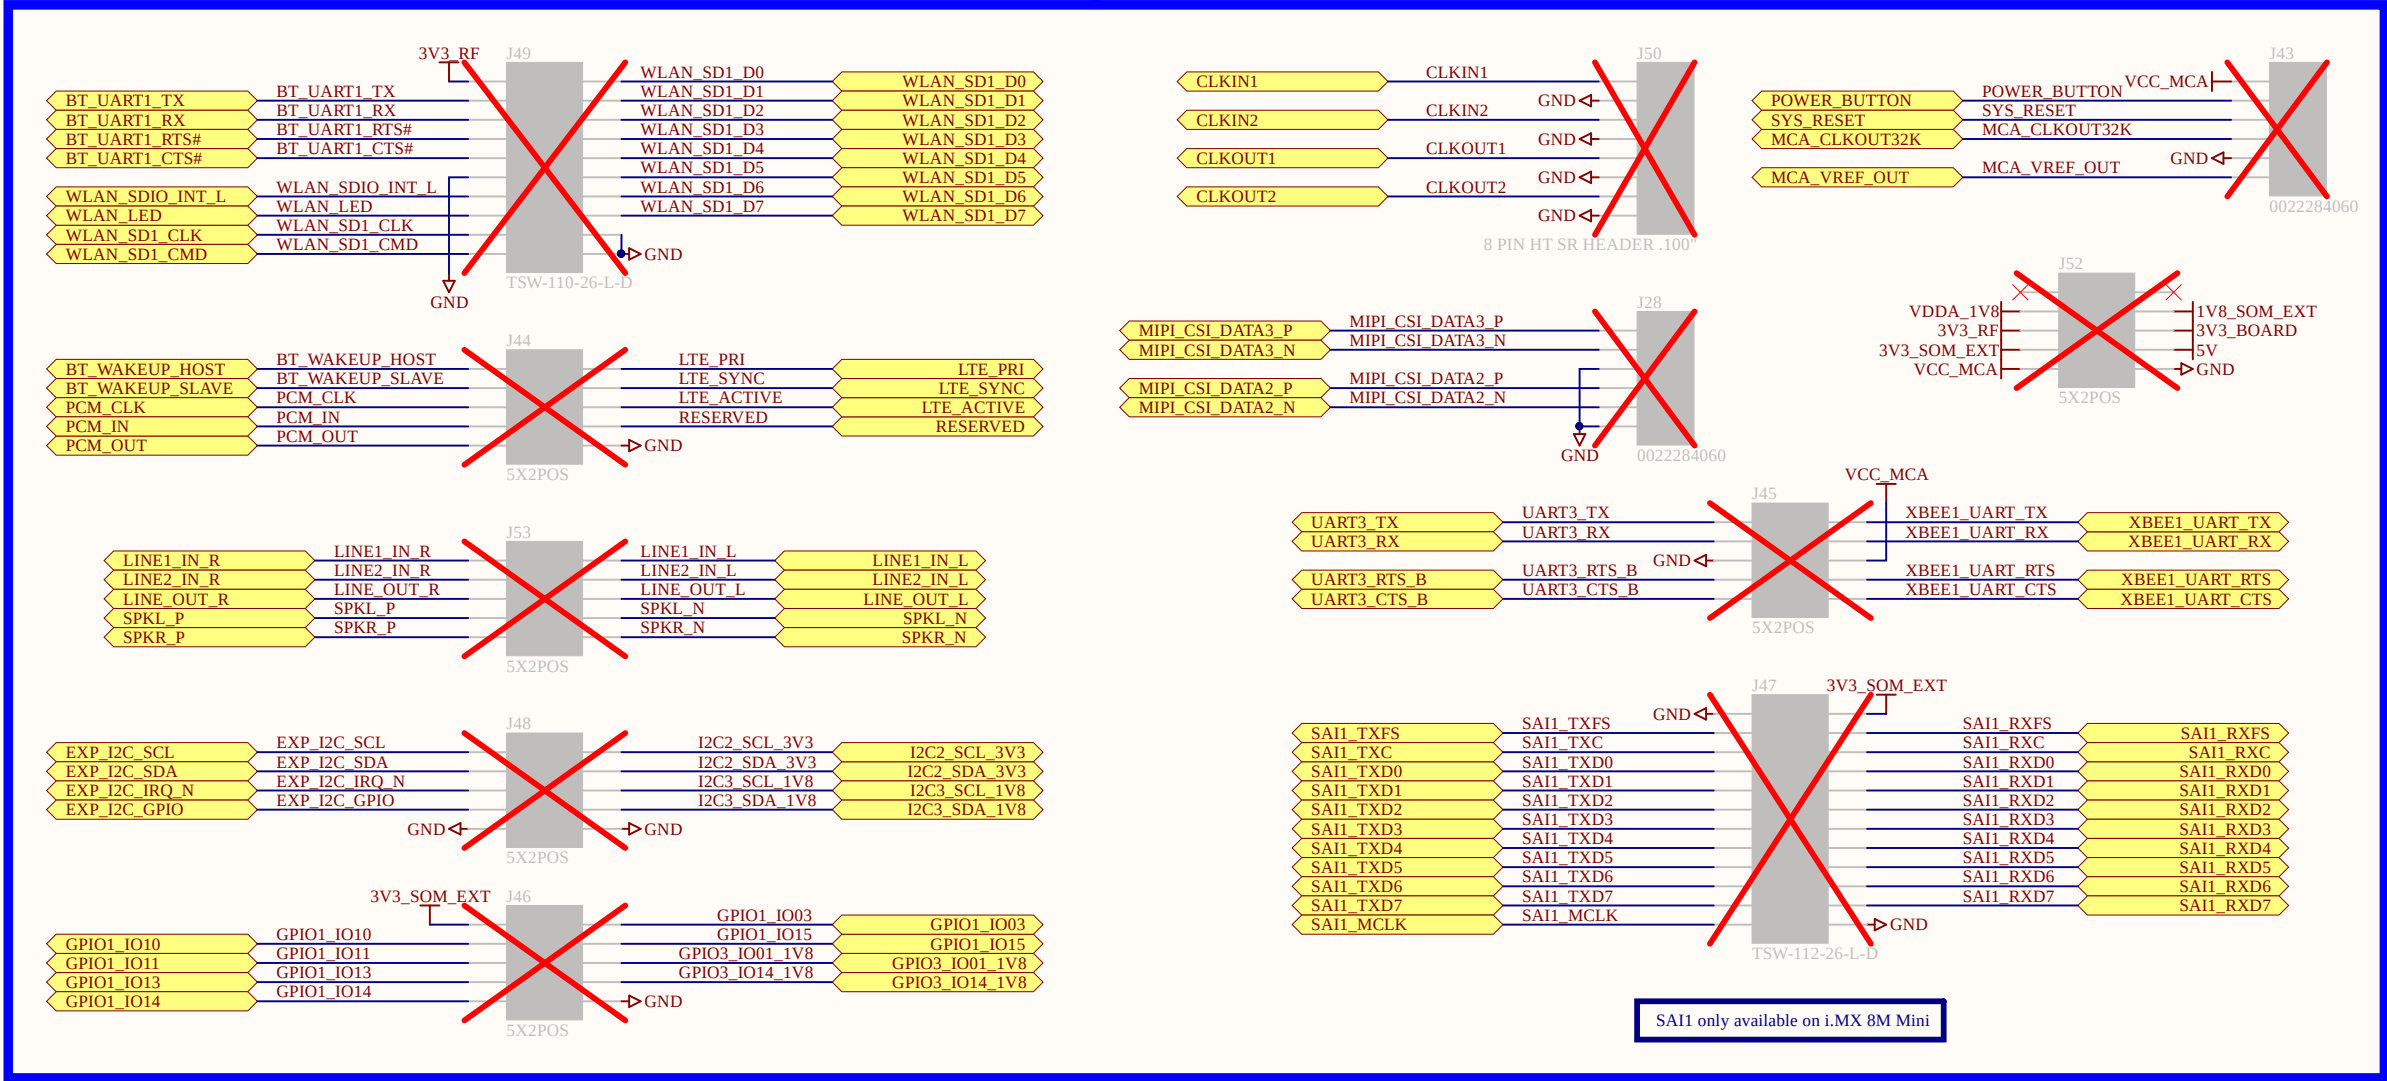

User LEDs & Buttons

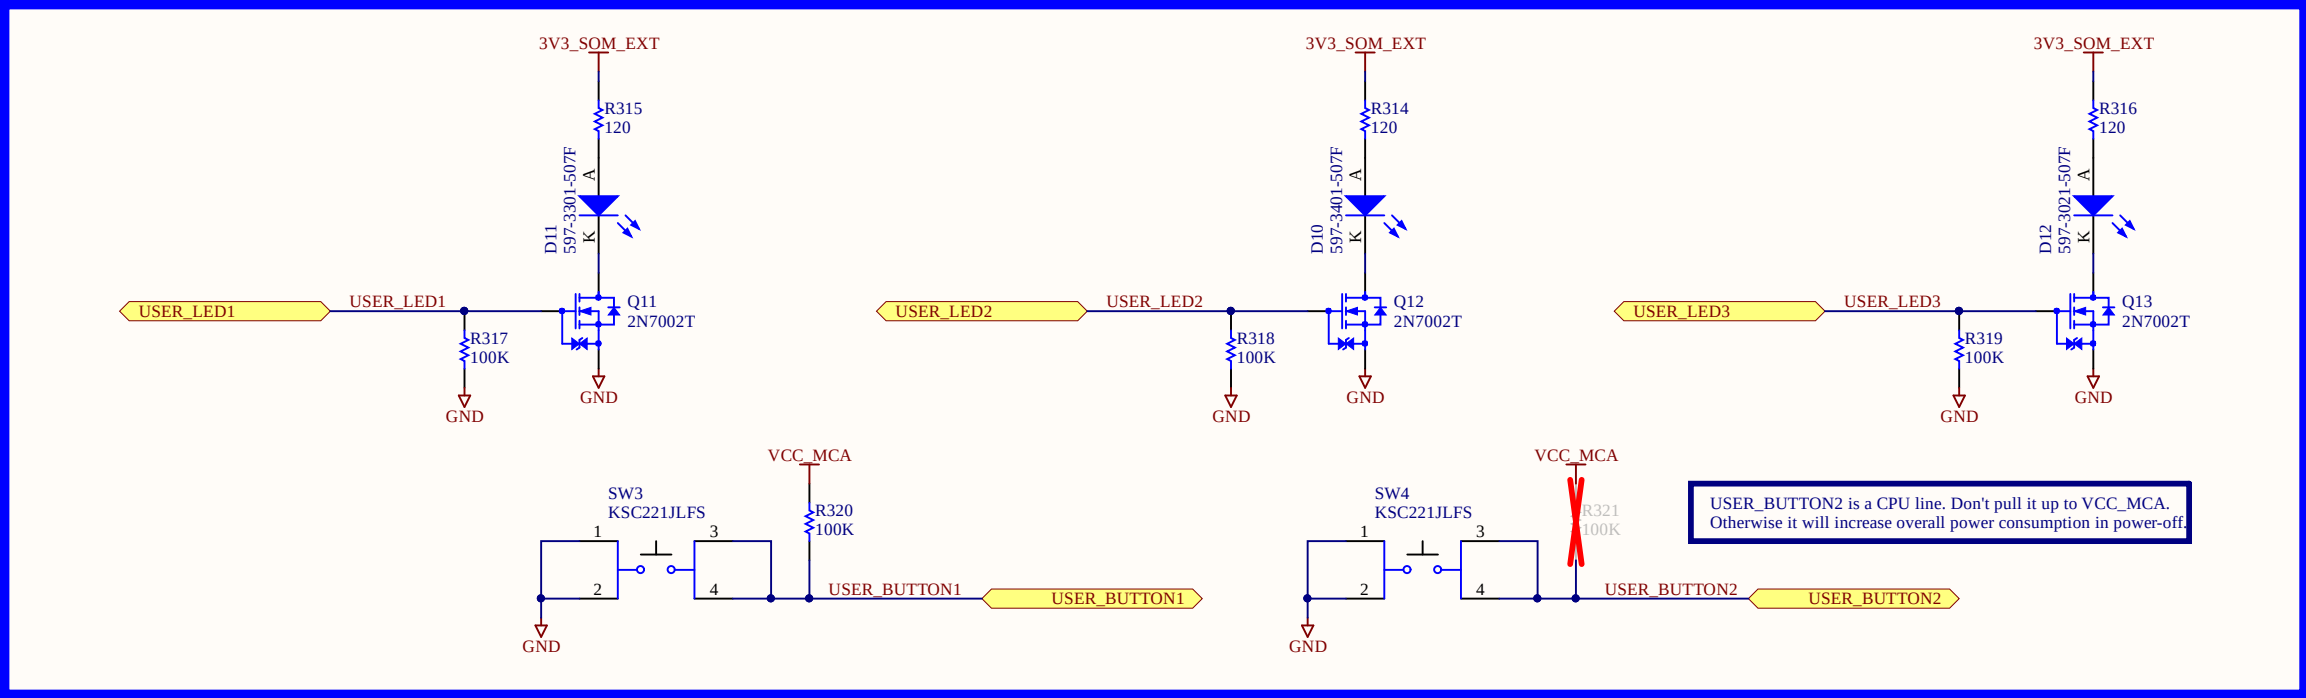

System Power Rails				
Voltage (V)	Supply Name	Block	Generated by	Current Capability (mA)
5.0	VIN	Input power protection	External DC supply	-
		MCA LDO		
	VIN_PROT	ConnectCore 8M Nano	Overvoltage Prot	-
		5V load switch		
		3.3V board regulator		
		USB Host		
		USB OTG		
	5V	CAN	Load switch (U3)	-
		HDMI		
		LVDS		
3.3	3V3_EXT	MicroSD	CC8M	3A Used also inside the SOM
		RS-485		
		CAN		
		Ethernet		
		MIPI CSI		
		LVDS		
		USB HUB		
		Audio		
		XBee1		
		XBee2		
	3V3_BOARD	PCIE	Switching regulator (U4)	3A
		XBee1		
		XBee2		
	VCC_MCA	MCA	AP2202	150mA
3.0	VCC_RTC	RTC	C1	
1.8	1V8_EXT	HDMI	CC8M	3A Used also inside the SOM
		LDVS		
		Audio		
1.5	PCIE_1V5	PCIE	3V3_BOARD	150mA

Signal Name	GPIO
3V3_BOARD_EN	GPIO3_IO19
5V_DVK_PWR_ON	GPIO1_IO06
AUD_INT#	GPIO3_IO22
AUD_PWR_EN	GPIO3_IO24
CAN_MODE	GPIO5_IO11
CAN_nINT	GPIO1_IO00
CAN_nINT0	GPIO1_IO01
CAN_nINT1	GPIO5_IO01
ENET_PWR	GPIO5_IO04
EXP_I2C_GPIO	GPIO5_IO26
EXP_I2C_IRQ_N	GPIO5_IO27
HDMI_HPD_1V8_CPU	GPIO3_IO08
LT8912B_INT	GPIO3_IO09
LT8912B_RST	GPIO3_IO07
LVDS_IRQ_N	GPIO4_IO28
LVDS_PWM_OUT	MCA_IO17
MIPI_CSI_RESET_N	GPIO1_IO12
PCIE_DIS_N	GPIO3_IO20
PCIE_RESET_N	GPIO3_IO23
PCIE_WAKE_N	GPIO3_IO21
POWER_LED	MCA_IO13
RGMII_INT_B	GPIO5_IO02
RGMII_RESET_N	GPIO5_IO03
SN65DSI83_EN	GPIO3_IO00
SN65DSI83_IRQ	GPIO3_IO06
USB_HUB_RESET_N	GPIO5_IO10
USB_PWR	GPIO3_IO25
USER_BUTTON1	MCA_IO10
USER_BUTTON2	GPIO2_IO20
USER_LED1	MCA_IO12
USER_LED2	MCA_IO18
USER_LED3	GPIO2_IO19
WOL_INT	GPIO5_IO05
XBEE1_ON/SLEEP_N	MCA_IO16
XBEE2_ON/SLEEP_N	GPIO1_IO09
XBEE1_RESET_N	MCA_IO15
XBEE2_RESET_N	GPIO1_IO08
XBEE1_SLEEP_RQ	MCA_IO11
XBEE2_SLEEP_RQ	GPIO1_IO07

Peripheral	7-bit address (Hex)
LVDS	-
MIPI CSI	-
Audio	0x10
PCie	-
Expansion I2C	-

Peripheral	7-bit address (Hex)
SN65DSI83	0x2C
LT8912B	0x48, 0x49, 0x4A

1	2	3	4	5	6	7	8								
A	Format: DD/MM/YYYY 11/11/2019 - CC8M Development Board * Revision: 01 - Initial version 18/12/2019 - CC8M Development Board * Revision: 02 - PCB spin: 3001623x-01 revA => 3001623x-02 revA 20/02/2020 - CC8M Development Board * Revision: 1P (NPRO-005669) - Release to 1P without BOM changes 15/09/2020 - CC8M Development Board * Revision: 2P (ECO-010844) - PCB spin: 3001623x-02 revA => 3001623x-03 revA 28/10/2020 - CC8M Development Board * Revision: 2P (ECO-010946) - Replace U20: 16052004 (going EOL) to 16000235 - Replace C22: 14050618 to 14050730 - Replace R224: 13050387 to 13051084 13/01/2021 - CC8M Development Board * ECO-011117 : 55002060-01 rev 4P - SoM PCB spin. No BOM changes on the DVK 03/02/2021 - CC8M Development Board * NPRO-005871 : 55002060-02 rev 1P - Release to 1P the DVK variant for the CC8M Mini SOM - Add USB2 port. - Change bootstrap resistors to boot from microSD 16/03/2021 - CC8M Development Board * ECO-011170 : 55002060-01 rev A - Release to rev A. No BOM changes on the DVK 12/04/2021 - CC8M Development Board * ECO-011172 : 55002060-02 rev 2P - CC8M Mini SOM PCB spin: 3001639x-01 revB => 3001639x-03 revA 23/08/2021 - CC8M Development Board * ECO-011478 : 55002060-01 rev B: - Replace U5 by the upper Digi PN: 50002027-01 => CC-WMX-FS7D-NN - Minor annotation updates						A								
B							B								
C	LBL1 LABEL 28000351_LABEL TXT1 LABEL TEXT 95022489 H1 H2 H3 H4 125mil 125mil 125mil 125mil						C								
D							D								
1	2	3	4	5	6	7	8								
						<table><tr><td colspan="2">Title: History, Mechanicals</td></tr><tr><td>Designer: Juan Anzola</td><td>Sheet: 21 of 21</td></tr><tr><td>Variant: 55002060-01</td><td>Rev: B</td></tr><tr><td colspan="2">Description: ConnectCore i.MX8 8M Development board</td></tr></table>	Title: History, Mechanicals		Designer: Juan Anzola	Sheet: 21 of 21	Variant: 55002060-01	Rev: B	Description: ConnectCore i.MX8 8M Development board		DIGI
Title: History, Mechanicals															
Designer: Juan Anzola	Sheet: 21 of 21														
Variant: 55002060-01	Rev: B														
Description: ConnectCore i.MX8 8M Development board															