



Digi XBee XR PRO

The Digi XBee XR PRO family operates in the 902 to 928 MHz range, delivering superior performance and interference immunity at 900 MHz

The **Digi XBee XR PRO** RF module is a compact and reliable solution supporting deployment of long-range connectivity applications. The pre-certified module operates between 902-928 MHz and is over-the-air compatible with **Digi XBee SX PRO** RF modules.

Secure, robust and reliable

The Digi XBee XR PRO RF modules can be configured easily using Digi's easy-to-use **Digi XBee Studio** software or via Digi's simplified AT or API command sets. They are pre-certified for use in multiple countries and include integrated antennas, removing the burden of RF development and support costs, and enabling fast time to market for OEM designs.

The utilization of Frequency Hopping Spread Spectrum (FHSS) on the Digi XBee XR PRO modules along with an industrial temperature range of -40 °C to 85 °C (-40 °F to 185 °F) make it ideal for applications in noisy, challenging environments.


The module supports both point-to-point and mesh networking protocols (**DigiMesh**) with a line-of-sight range up to 18 kilometers (11 miles). It is well suited for agriculture and energy applications where long-distance communication is required.

The Digi XBee XR PRO RF module is a complete hardware and software solution that works directly out of the box. Development kits and **Digi XBee Tools** support the complete IoT application lifecycle, from evaluation, testing and prototyping through manufacturing and deployment to long-term network management.

Key features, benefits and applications

- Fully certified for use in unlicensed 900 MHz band
- RF module based on Silicon Labs EFR32 microcontroller
- Design includes SAW filter for optimal performance in noisy RF environments
- 256-bit AES encryption for secure data communication
- Pin and over-the-air compatible with **Digi XBee SX PRO**
- **DigiMesh** networking topology for redundancy and reliability
- Simple and advanced configuration using **Digi XBee Studio** accelerates time to market
- **Digi XBee Tools** to simplify tasks and get to market faster

Application example

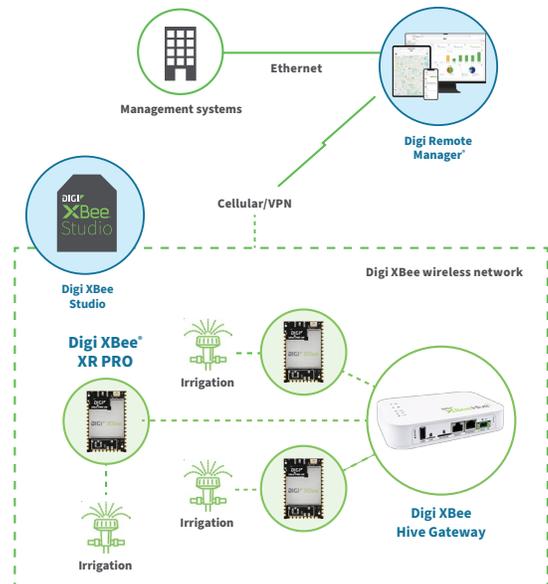

Need custom gateway engineering support?
Contact Digi Wireless Design Services.

Related Digi devices



DIGI XBEE XR PRO

Specifications



Manage and configure Digi XBee XR PRO modules with Digi XBee Studio

Specifications	Digi XBee XR PRO
HARDWARE	
PROCESSOR	EFR32FG13P231F512 transceiver at 40 MHz
FREQUENCY BAND	902 MHz to 928 MHz
AVAILABLE FORM FACTORS	Surface-mount (SMT)
ANTENNA OPTIONS	SMT: U.FL connector, RF pad, chip antenna
WEIGHT	SMT: 3.0 g (0.106 oz)
DIMENSIONS	SMT: 2.199 cm x 3.4 cm x 0.305 cm (0.866 in x 1.33 x 0.120 in)
PERFORMANCE	
RF DATA RATE	Low data rate: 10 kbps, middle data rate: 110 kbps, high data rate: 250 kbps
UART DATA RATE	Up to 921.6 kbps
SPI DATA RATE	Up to 5 Mbps
LINE-OF-SIGHT RANGE*	Up to 18 km (11 mi)
INDOOR RANGE	Up to 300 m (1,000 ft)
TRANSMIT POWER	Up to 30 dBm ERP
RECEIVER SENSITIVITY	Low data rate: -113 dBm, middle data rate: -108 dBm, high data rate: -104 dBm
RECEIVER BLOCKING	Below 900 MHz and above 930 MHz; >70 dB
FEATURES	
DIGITAL I/O	15
AVAILABLE CHANNEL FREQUENCIES	Low and middle data rate: 101**, high data rate: 50
ANALOG INPUTS	(4) 10-bit ADC inputs
OPERATING TEMPERATURE	-40 °C to 85 °C (-40 °F to 185 °F)
NETWORKING TOPOLOGIES	Point-to-point/point-to-multipoint, DigiMesh; SX protocol compatible
SECURITY	256-bit AES encryption
POWER	
SUPPLY VOLTAGE	2.1 – 3.6 VDC, 3.3 VDC typical
TRANSMIT CURRENT	900 mA at 30 dBm; 640 mA at 27 dBm; 330 mA at 20 dBm
RECEIVE CURRENT	40 mA
SLEEP CURRENT	2.5 uA
NETWORKING AND SECURITY	
MODULATION	Gaussian Frequency Shift Keying
SPREADING TECHNOLOGY	Frequency Hopping Spread Spectrum (FHSS)
GENERAC	
MANUFACTURING	ISO 9001:2000 registered standards
ANTENNA IMPEDANCE	50 ohms
MAXIMUM INPUT RF LEVEL	At antenna port: 6 dBm
REGULATORY APPROVALS**	
FCC (USA)	Approved
ISED (CANADA)	Approved
ROHS	Approved
WARRANTY	
PRODUCT WARRANTY	1-year

*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

**Visit digi.com/resources/certifications for latest updates.

DIGI XBEE XR PRO

Management and Configuration

Digi XBee Studio

Free multi-platform application that enables developers to manage Digi XBee devices through a simple-to-use graphical interface

Digi XBee Studio is the definitive tool to manage and configure Digi XBee devices. This next generation configuration tool suite supersedes **Digi XCTU** and offers an advanced set of tools that make it easy to set up, configure, communicate with and test Digi XBee modules and devices.

The first thing you need to do in order to work with XBee devices in XBee Studio is to add them to the tool. In XBee Studio, this is easier than ever.

Simple setup and connectivity

Just after startup, XBee Studio will automatically look for XBee devices connected to your computer. As modules are found, they will appear in the Device Browser view. The Device Browser view displays all the devices connected to your computer.

View and manage your Digi XBee devices

View all of your Digi XBee devices in one table, or if they are geo-located, you can switch to the map view and see the location of each one.

Digi XBee Studio also offers a simple and step-by-step way to access and manage devices, including additional options for configuration, diagnostics, development, remote management and other utilities.

Proven experience and expert support


Our decades of embedded experience and millions of deployed devices tell our story; Digi is a trusted solutions provider dedicated to simplifying the way OEMs design, build, deploy and maintain secure connected products.

Digi Wireless Design Services (WDS) is an engineering team that provides additional connectivity integration support, certification assistance, and custom design and build services to get your products to market smarter and faster. The expert team of WDS engineers can support you wherever you are along your development path.



Key features

- **Deploy on multiple platforms:** Digi XBee Studio is compatible with the most popular operating systems, including Microsoft Windows, macOS and Linux.
- **Discover your devices:** Automatically discover XBee devices connected to your computer, regardless of their port connections or configured settings.
- **Configure any device:** Manage and configure multiple XBee devices at once, including devices enrolled in your Digi Remote Manager account located anywhere in the world.
- **Communicate with your devices:** Use the new smart XBee console to communicate with your devices regardless of whether they are configured for API mode or transparent mode..
- **Access a range of tools:** Use embedded tools to perform operations like creating XBee profiles or recovering your devices.
- **Get automatic updates:** Automatically update the application itself, as well as the radio firmware library, without downloading any extra files.

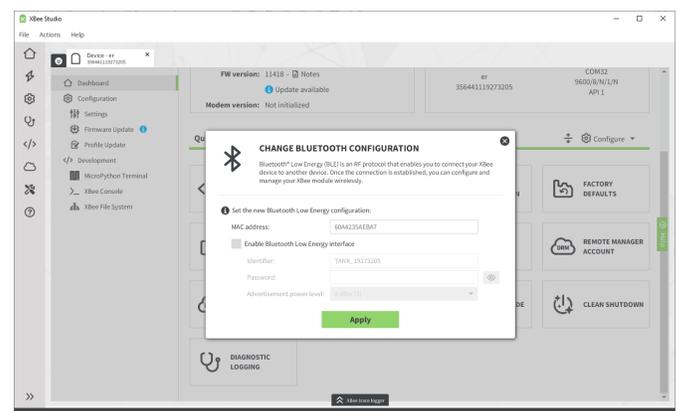

DIGI XBEE XR PRO

Digi XBee Ecosystem, Tools and Supporting Services

Digi XBee Ecosystem

The world-renowned XBee module is part of a family of cellular modems and RF modules that provide ultimate flexibility for IoT application developers, with three programmable form factors, and a range of popular wireless protocols. The XBee family also includes IoT gateways and management tools to connect, monitor and manage your XBee network.

[Learn more at digi.com/xbee.](http://digi.com/xbee)

Build. Deploy. Manage.




The **Digi XBee Ecosystem** is fully supported with the award-winning **Digi XBee Tools** suite. Designed to support the full product lifecycle, from prototyping and development to deployment and ongoing monitoring, Digi XBee Tools includes code libraries, testing and prototyping tools, product development and manufacturing support, and tools for deploying and managing end devices in the field.

Digi Wireless Design Services

Digi WDS supports new designs and redesigns

We offer services to support you wherever you are along your development path, with a record that speaks for itself.

- Proof of concept
- Architecture consultation
- Requirements definition
- System, software and electrical design
- Design reviews
- Certifications
- Prototype build
- Manufacturing test fixtures
- 250+ product development projects
- 100+ certification failure rescues
- 100 million connected devices around the globe

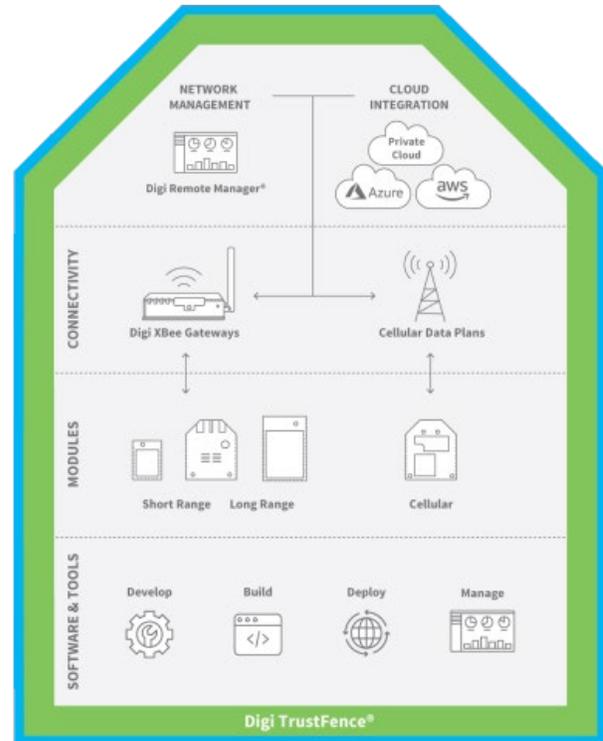

DEFINITION



DEVELOPMENT



CERTIFICATION



MANUFACTURING

Get to market faster with Digi WDS

Digi Wireless Design Services (WDS) has a proven history of helping clients speed down the path to success by guiding them through the technological and regulatory certification pitfalls that botch budgets and disrupt product introductions.

We begin by actively listening to your business and technical requirements, and then leverage our proven methodology, world-class engineering expertise and library of IP to design a cost-effective solution that is tailored to your specific needs. Accelerate toward the solution that is right for you and your customers.

Contact **Digi WDS** to find out how we can guide you to success.

DIGI XBEE XR PRO

Product Photos

Digi XBee XR PRO photos and dimensions




Digi XBee XR PRO — SMT, U.FL

Digi XBee XR PRO — SMT, Chip Antenna

Digi XBee XR PRO — SMT, RF Pad



2.199 cm

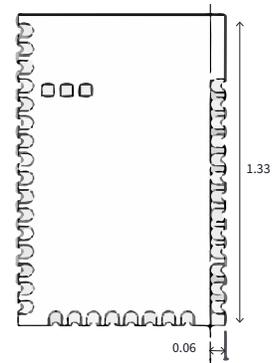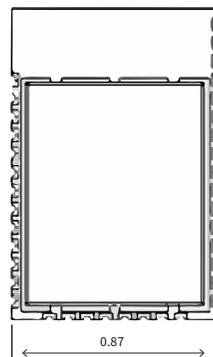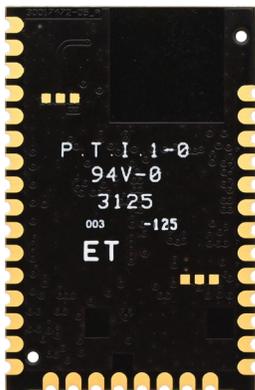

DIGI XBEE XR PRO

Part Numbers

Part Numbers		Digi XBee XR PRO 900
DIGI XBEE XR PRO SURFACE-MOUNT (SMT)		
XBP-9XR-US-001		Digi XBee XR PRO — 900 MHz, DigiMesh, U.FL, Surface Mount
XBP-9XR-RS-001		Digi XBee XR PRO — 900 MHz, DigiMesh, RF Pad, Surface Mount
XBP-9XR-CS-001		Digi XBee XR PRO — 900 MHz, DigiMesh, Chip Antenna, Surface Mount

Part Numbers		Digi XBee XR PRO Development Kit
DIGI XBEE XR PRO DEVELOPMENT KIT		
XK-9XRP-DMS-0		Digi XBee XR PRO Development Kit

The Digi XBee XR PRO Development Kit includes:

- (3) Digi XBee XR PRO RF modules — SMT, U.FL
- (3) Digi XBIB-C Development Boards — SMT
- (3) Dipole antennas with U.FL connector

Digi XBee Studio and Digi XBee Tools
Free Level 1 schematic review from Digi WDS
Additional documentation and examples



For more information, visit [digi.com](https://www.digi.com).



For more information about Digi XBee XR PRO,
visit [digi.com/xbee-xr-pro](https://www.digi.com/xbee-xr-pro).

877-912-3444 | 952-912-3444

